



Freeze Tech

to'gether
to future

Meeting Point Of
↘ Professionals

WHO WE ARE
WER WIR SIND


We create solutions that shape retail, engineer the experience, and preserve food through our products.

Wir entwickeln Lösungen, die den Einzelhandel gestalten, Kundenerlebnisse mit ingenieurtechnischem Know-how konzipieren und Lebensmittel mit unseren Produkten sicher schützen.




47+

Countries that we exported
Exportierte Länder



6

Group of Companies
Gruppenunternehmen



16.000m

Production Capacity Annually
Jährliche Produktionskapazität



375 Experienced employee
Erfahrene Fachkräfte



27.590m²


Closed Area
Überbaute Fläche

Lion OF


Open Front Multi-Deck Cabinet
Offenes Wandkühlregal




Sectional Drawings Schnittzeichnungen

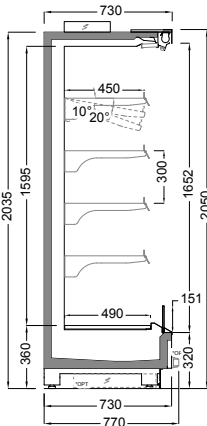


LION V3 OF/75/205

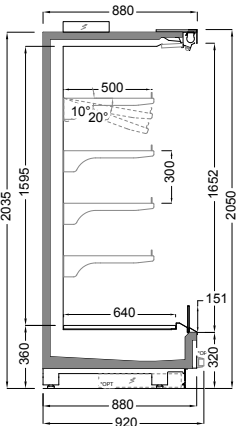


LION V3 OF/90/205

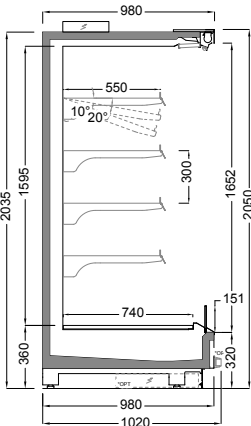


LION V3 OF/100/205

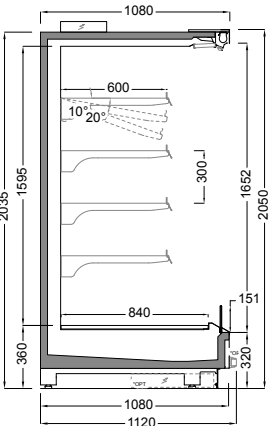


LION V3 OF/110/205

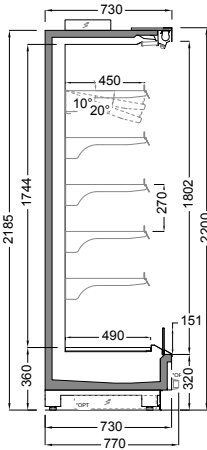


LION V3 OF/75/220

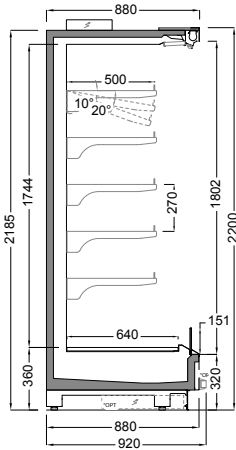

LION V3 OF/90/220

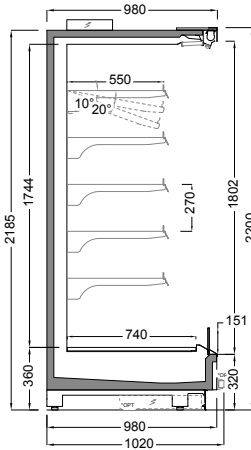

LION V3 OF/100/220

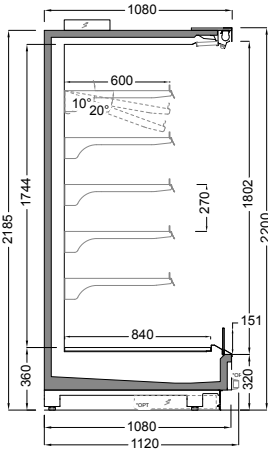

LION V3 OF/110/220


<div> <div>± °C</div> <div>MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)</div> </div>	<div> <div>Remote</div> </div>
<div> <div>mm</div> <div>937 1250 1875 2500 3125 3750</div> </div>	<div> <div>Off-Cycle Defrost</div> </div>
<div> <div>mm</div> <div>2050 2200</div> </div>	<div> <div>1650 1955 2250</div> </div>
<div> <div>mm</div> <div>750 900 1000 1100</div> </div>	<div> <div>HFC, HFC/HFO Blend, CO₂ (R744)</div> </div>
<div> <div>mm</div> <div>40</div> </div>	<div> <div>25°C DBT / 60% RH (ISO 23953-2)</div> </div>

Lion CF


Glass Door Multi-Deck Cabinet
Wandkühlregal mit Drehtür




Sectional Drawings Schnittzeichnungen

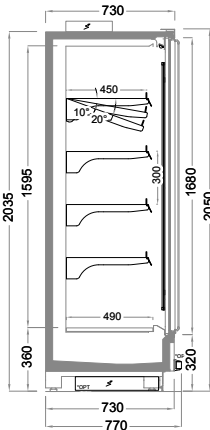


LION V3 CF/75/205

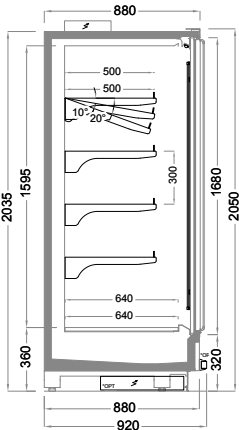


LION V3 CF/90/205

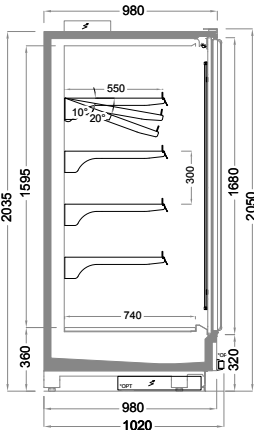


LION V3 CF/100/205

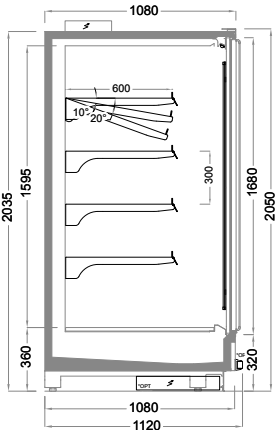


LION V3 CF/110/205

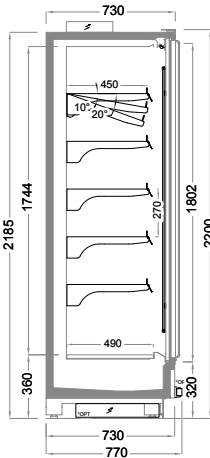


LION V3 CF/75/220

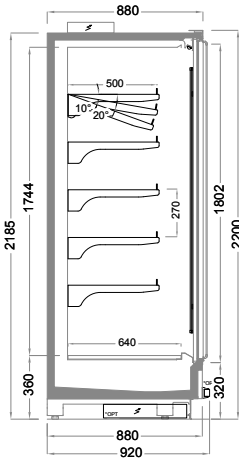

LION V3 CF/90/220

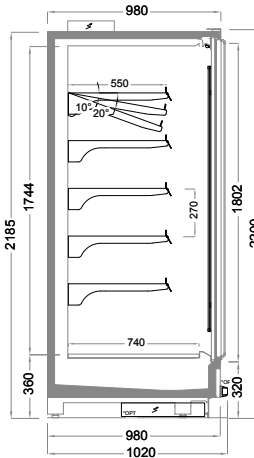

LION V3 CF/100/220

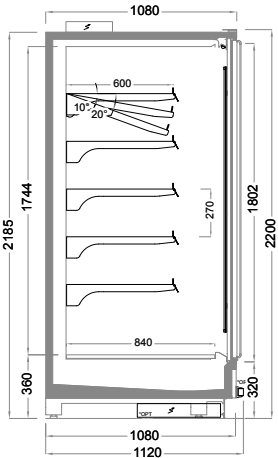

LION V3 CF/110/220

$\pm$ °C MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 2050 2200	 1650 1955 2250
 750 900 1000 1100	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)


Lion SKY

All Glass Door Multi-Deck Cabinet
Wandkühlregal mit Vollglas-Drehtür



<div> <div>± °C</div> <div> MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C) </div> </div>	<div> <div>  Remote </div> </div>
<div> <div> <div>mm</div> <div>937 1250 1875 2500 3125 3750</div> </div> </div>	<div> <div> <div>  Off-Cycle Defrost </div> </div> </div>
<div> <div> <div>mm</div> <div>2050 2200</div> </div> </div>	<div> <div> <div>  1650 1955 2250 </div> </div> </div>
<div> <div> <div>mm</div> <div>750 900 1000 1100</div> </div> </div>	<div> <div> <div>  HFC HFC/HFO Blend CO₂ (R744) </div> </div> </div>
<div> <div> <div>mm</div> <div>40</div> </div> </div>	<div> <div> <div>  25°C DBT / 60% RH (ISO 23953-2) </div> </div> </div>

Sectional Drawings Schnittzeichnungen

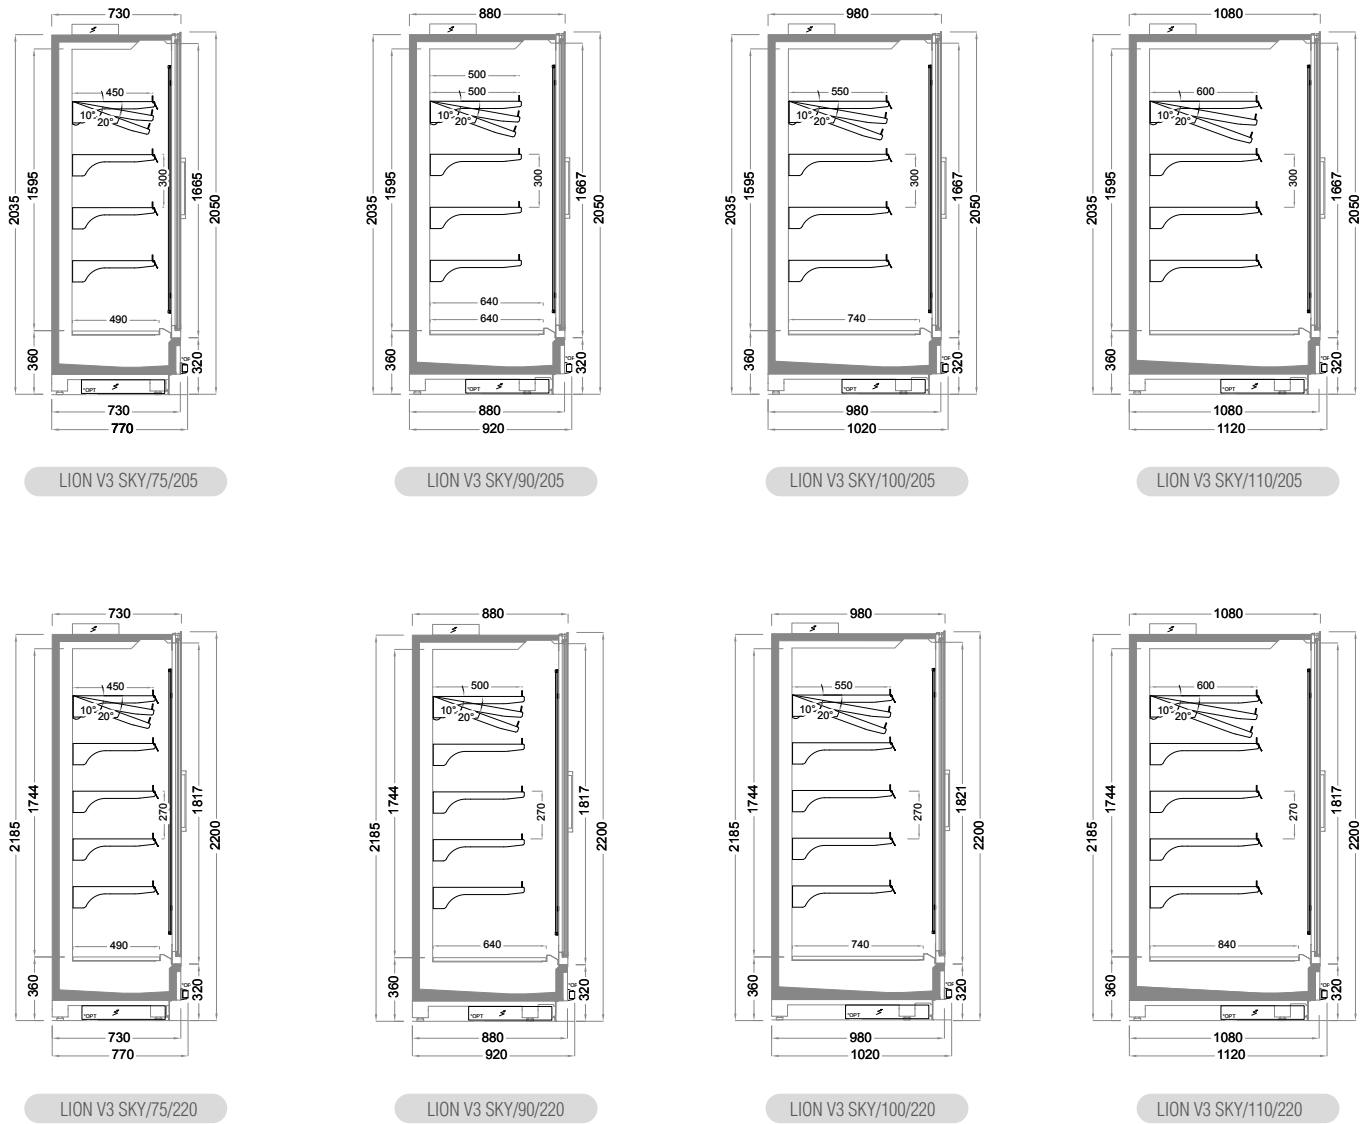


Lion FV-A


Produce Open Front Multi-Deck Cabinet
Obst und Gemüse - Offenes Wandkühlregal




Sectional Drawings Schnittzeichnungen

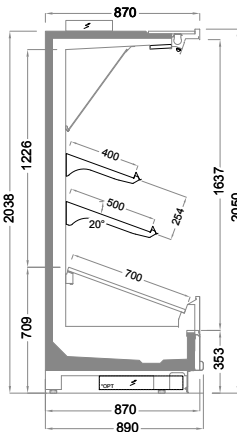


LION V2 FV-A/90/205

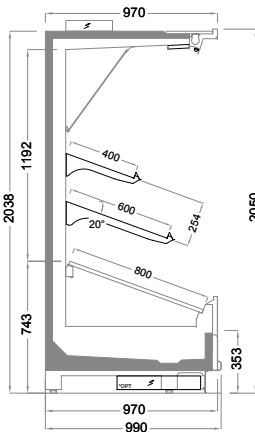


LION V2 FV-A/100/205

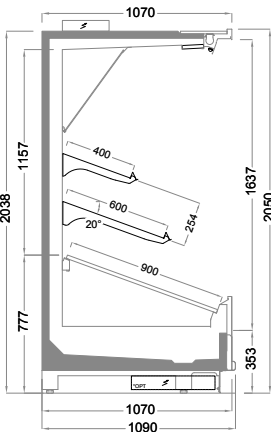


LION V2 FV-A/110/205

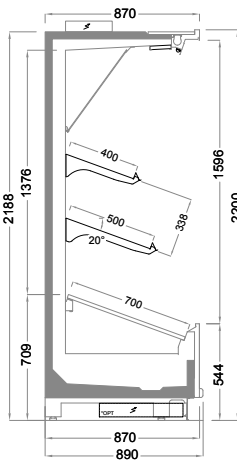

LION V2 FV-A/90/220

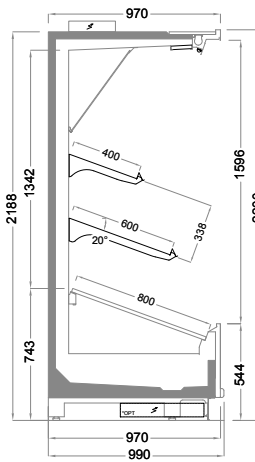

LION V2 FV-A/100/220

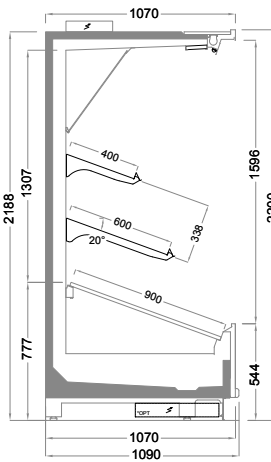

LION V2 FV-A/110/220


<div> <div>± °C</div> <div>MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)</div> </div>	<div> <div></div> <div>Remote</div> </div>
<div> <div></div> <div>937 1250 1875 2500 3125 3750</div> </div>	<div> <div></div> <div>Off-Cycle Defrost</div> </div>
<div> <div></div> <div>2050 2200</div> </div>	<div> <div></div> <div>N/A</div> </div>
<div> <div></div> <div>1000 1100</div> </div>	<div> <div></div> <div>HFC HFC/HFO Blend CO₂ (R744)</div> </div>
<div> <div></div> <div>40</div> </div>	<div> <div></div> <div>25°C DBT / 60% RH (ISO 23953-2)</div> </div>

Lion BW


Back Wall Service Cabinet
Rückwandkühlregal




Sectional Drawings Schnittzeichnungen

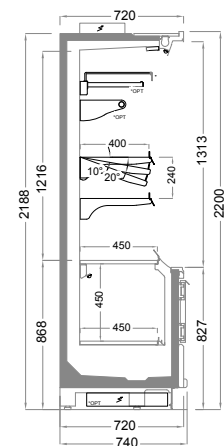


LION V2 BW/OF/75/205

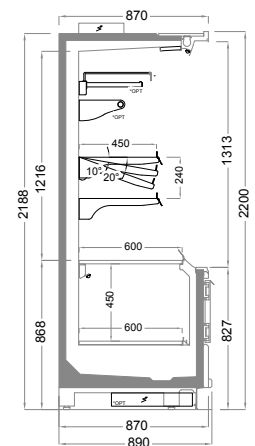

LION V2 BW/OF/90/205

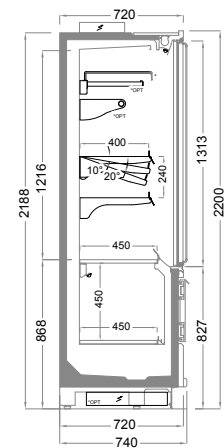

LION V2 BW/CF/75/220

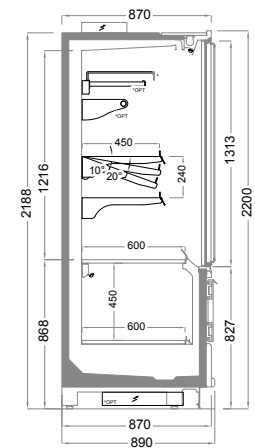

LION V3 BW/CF/90/220


<div><div><div>± °C</div></div><div>MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)</div></div>	<div><div><div></div></div><div>Remote</div></div>
<div><div><div><div><div>↗</div></div><div>mm</div></div></div><div>937 1250 1875 2500 3125 3750</div></div>	<div><div><div><div><div></div></div></div><div>Off-Cycle Defrost</div></div></div>
<div><div><div><div><div>↑</div></div><div>mm</div></div></div><div>2050 2200</div></div>	<div><div><div><div><div></div></div></div><div>N/A</div></div></div>
<div><div><div><div><div>↗</div></div><div>mm</div></div></div><div>750 900</div></div>	<div><div><div><div><div></div></div></div><div>HFC HFC/HFO Blend CO₂ (R744)</div></div></div>
<div><div><div><div><div> </div></div><div>mm</div></div></div><div>40</div></div>	<div><div><div><div><div></div></div></div><div>25°C DBT / 60% RH (ISO 23953-2)</div></div></div>

Camel OF


Open Front Low Base Multi-Deck Cabinet
Offenes Niedrigsockel-Wandkühlregal




Sectional Drawings Schnittzeichnungen

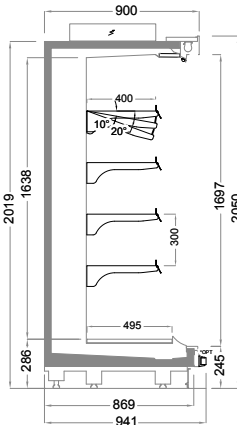


CAMEL OF/90/205

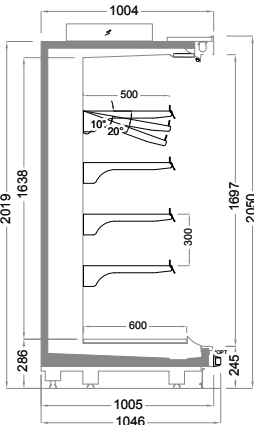


CAMEL OF/100/205

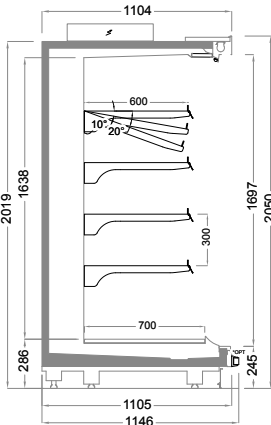


CAMEL OF/110/205

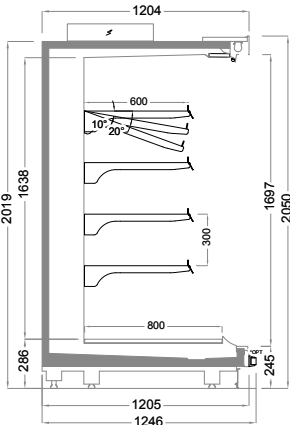


CAMEL OF/120/205

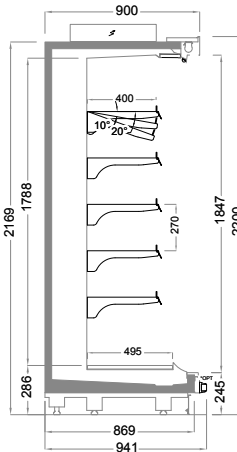


CAMEL OF/90/220

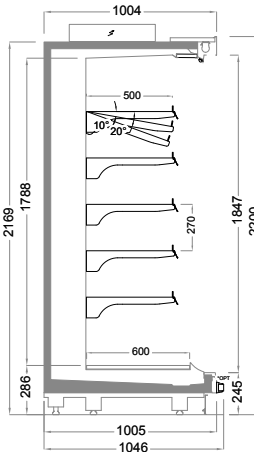

CAMEL OF/100/220

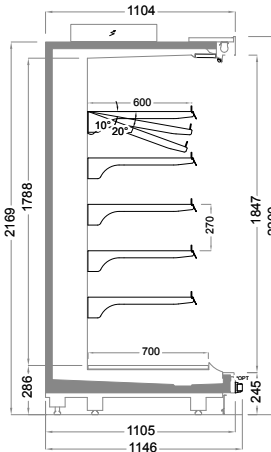

CAMEL OF/110/220

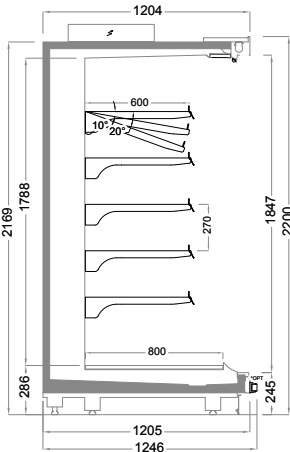

CAMEL OF/120/205


<div> <div>± °C</div> <div> MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C) </div> </div>	<div> <div>  Remote </div> </div>
<div> <div>  mm </div> <div>1250 1875 2500 3125 3750</div> </div>	<div> <div>  Off-Cycle Defrost </div> </div>
<div> <div>  mm </div> <div>2050 2200</div> </div>	<div> <div>  1955 2250 </div> </div>
<div> <div>  mm </div> <div>900 1000 1100 1200</div> </div>	<div> <div>  HFC HFC/HFO Blend CO₂ (R744) </div> </div>
<div> <div>  mm </div> <div>40</div> </div>	<div> <div>  25°C DBT / 60% RH (ISO 23953-2) </div> </div>

Camel CF


Glass Door Low Base Multi-Deck Cabinet
Niedrigsockel-Wandkühlregal mit Drehtür




Sectional Drawings Schnittzeichnungen

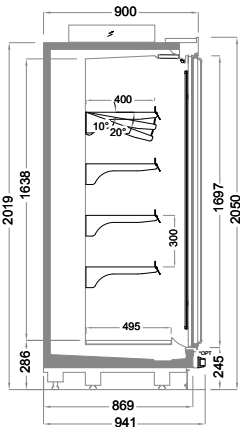


CAMEL CF/90/205

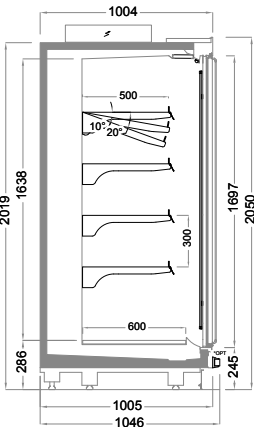


CAMEL CF/100/205

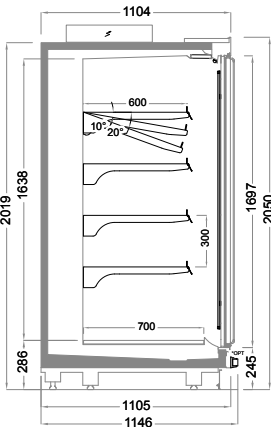


CAMEL CF/110/205

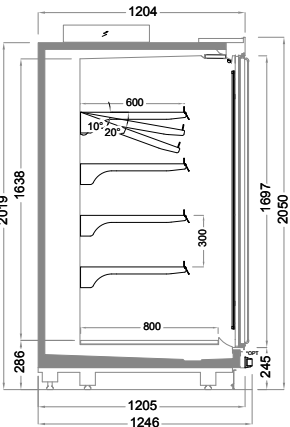


CAMEL CF/120/205

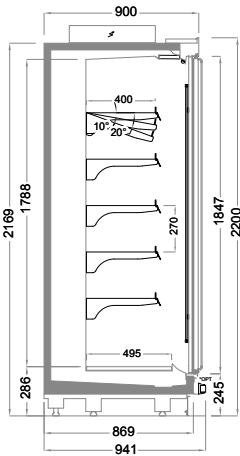


CAMEL CF/90/220

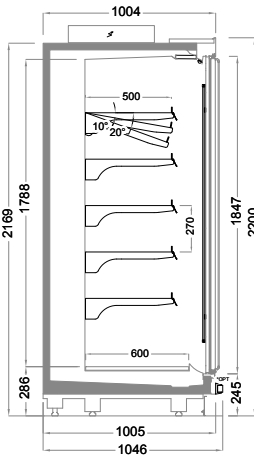

CAMEL CF/100/220

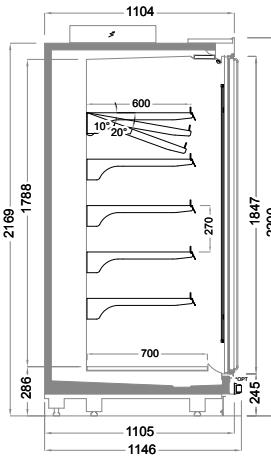

CAMEL CF/110/220

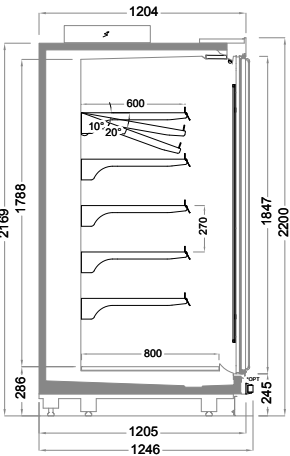

CAMEL CF/120/220


$\pm 1^{\circ}\text{C}$ MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)	 Remote
 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 2050 2200	 1955 2250
 900 1000 1100 1200	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Dragon


BWS Glass Door Multi-Deck Cabinet
Getränke-Wandkühlregal mit Drehtüren




Sectional Drawings Schnittzeichnungen

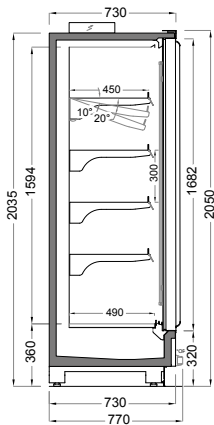


DRAGON V3 CF/75/205

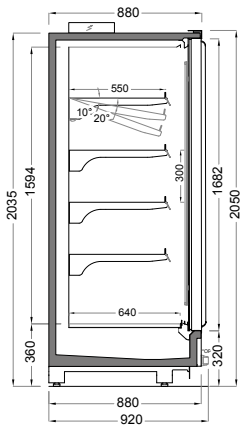

DRAGON V3 CF/90/205

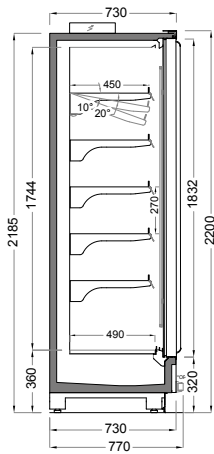

DRAGON V3 CF/75/220

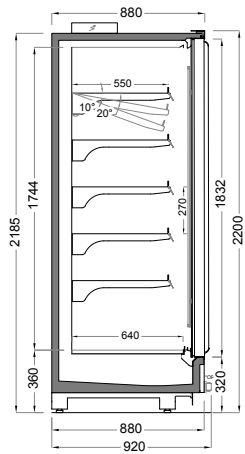

DRAGON V3 CF/90/220

<div><div>± °C</div><div>MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)</div></div>	<div><div></div><div>Remote</div></div>
<div><div></div><div>795 (1D) 1562 (2D) 2343 (3D) 3124 (4D) 3905 (5D)</div></div>	<div><div></div><div>Off-Cycle Defrost</div></div>
<div><div></div><div>2050 2200</div></div>	<div><div></div><div>N/A</div></div>
<div><div></div><div>750 900</div></div>	<div><div></div><div>HFC HFC/HFO Blend CO₂ (R744)</div></div>
<div><div></div><div>40</div></div>	<div><div></div><div>25°C DBT / 60% RH (ISO 23953-2)</div></div>




Semi-Vertical Multi-Decks

NIEDRIGES
KÜHLREGAL


Falcon OF

Open Front Semi-Vertical Multi-Deck Cabinet
Offenes Niedriges Kühlregal

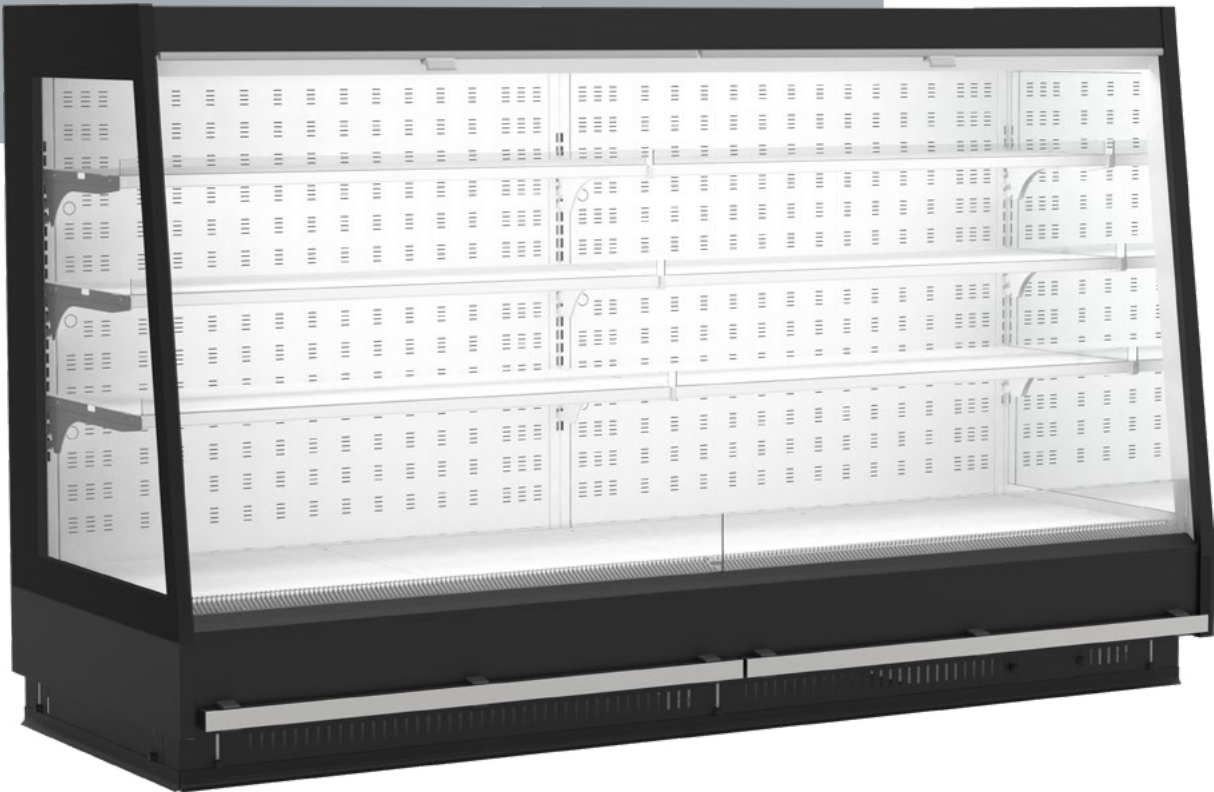

$\pm$ °C MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1550 1650 1750	 1650 1955 2250
 750 900 1000	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Schnittzeichnungen

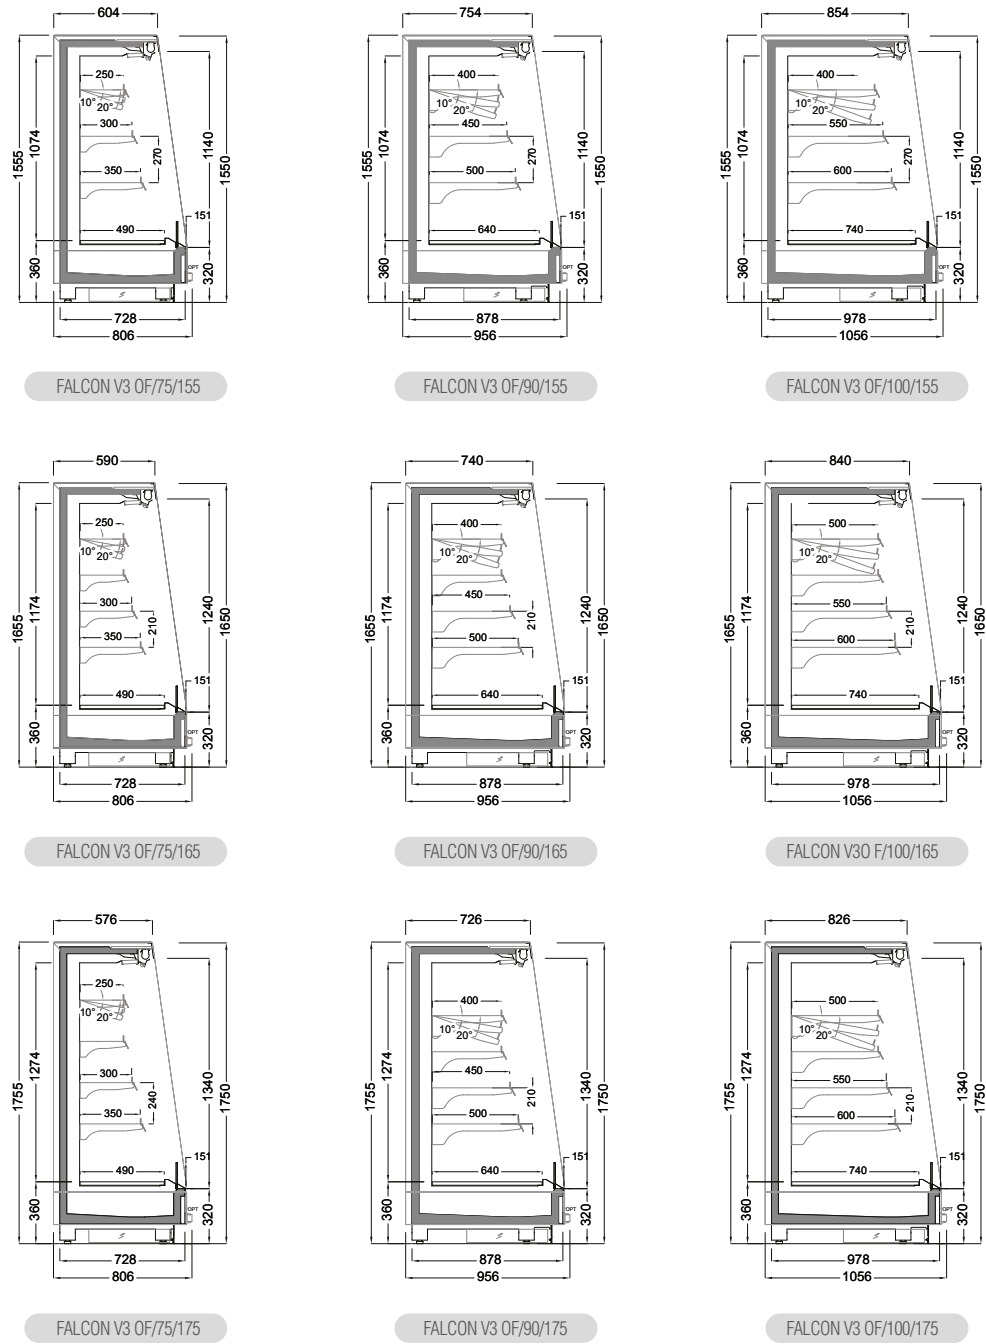


Falcon CF

Glass Door Semi-Vertical Multi-Deck Cabinet
Niedriges Kühlregal mit Drehtür



<div> <div> <div>±</div> <div>°C</div> </div> <div> MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C) </div> </div>	<div> <div> <div>❄️</div> <div>Remote</div> </div> </div>
<div> <div> <div>↗️</div> <div>mm</div> </div> <div> 937 1250 1875 2500 3125 3750 </div> </div>	<div> <div> <div>❄️</div> <div>Off-Cycle Defrost</div> </div> </div>
<div> <div> <div>↗️</div> <div>mm</div> </div> <div> 1550 1650 1750 </div> </div>	<div> <div> <div>📦</div> <div>1650 1955 2250</div> </div> </div>
<div> <div> <div>↗️</div> <div>mm</div> </div> <div> 750 900 1000 </div> </div>	<div> <div> <div>🧊</div> <div>HFC HFC/HFO Blend CO₂ (R744)</div> </div> </div>
<div> <div> <div> </div> <div>mm</div> </div> <div> 40 </div> </div>	<div> <div> <div>🌀</div> <div>25°C DBT / 60% RH (ISO 23953-2)</div> </div> </div>

Sectional Drawings Schnittzeichnungen

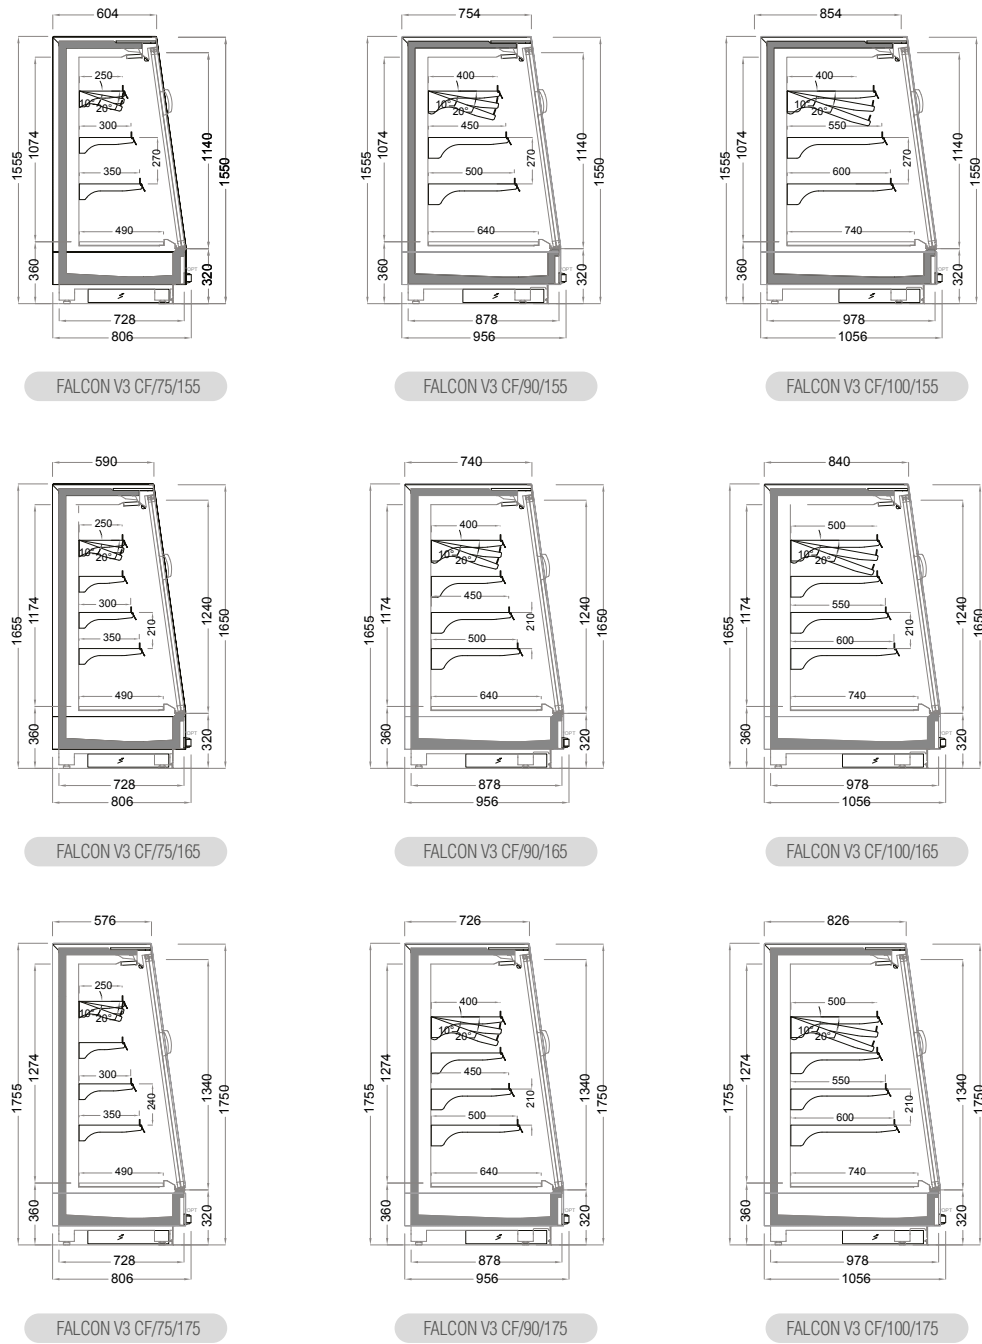


Falcon SKY

All Glass Door Semi-Vertical Multi-Deck Cabinet
Niedriges Kühlregal mit Vollglas-Drehtür




 MX: 3M0 (-1/+4°C) MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1550 1650 1750	 1650 1955 2250
 750 900 1000	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)


Sectional Drawings Schnittzeichnungen




FALCON V3 SKY/75/155




FALCON V3 SKY/90/155




FALCON V3 SKY/100/155

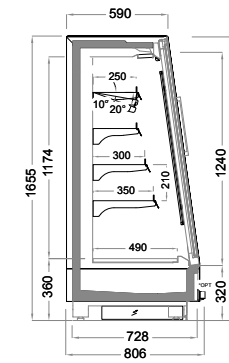


FALCON V3 SKY/75/165

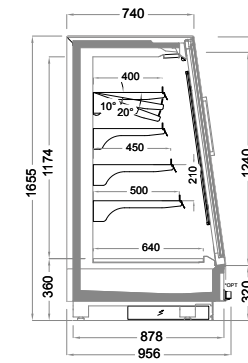


FALCON V3 SKY/90/165

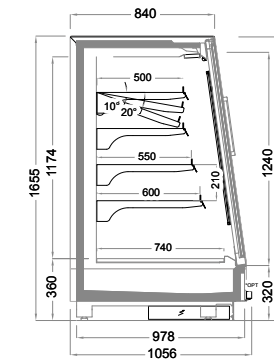


FALCON V3 SKY/100/165

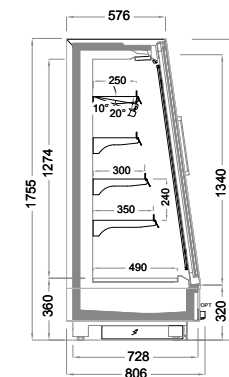

FALCON V3 CF/75/175

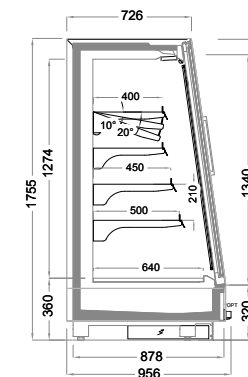

FALCON V3 CF/90/175

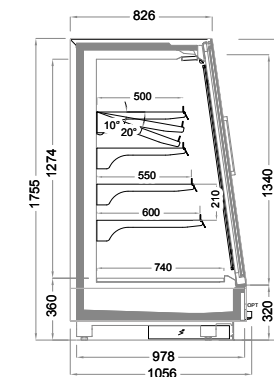


FALCON V3 CF/100/175

Rhino & Rhino TC


Produce Open Front Semi-Vertical Cabinet
Obst und Gemüse – Offenes Niedriges Kühlregal




Sectional Drawings Schnittzeichnungen




RHINO 90/163



RHINO 125/163

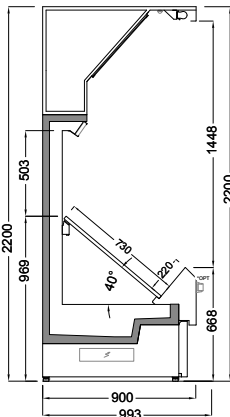

RHINO TC 90/220

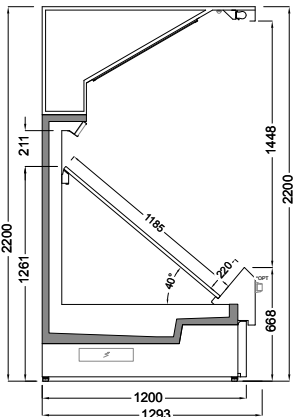

RHINO TC 125/220




$\pm$ ° DP: 3M2 (-1/+7°C) FV: 3H1 (+1/+10°C)	 Remote
 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1650 2200	 N/A
 900 1250	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Tiger FG


Flat Glass Serve-Over Counter

Bedienungstheke mit Geraden Glasflächen

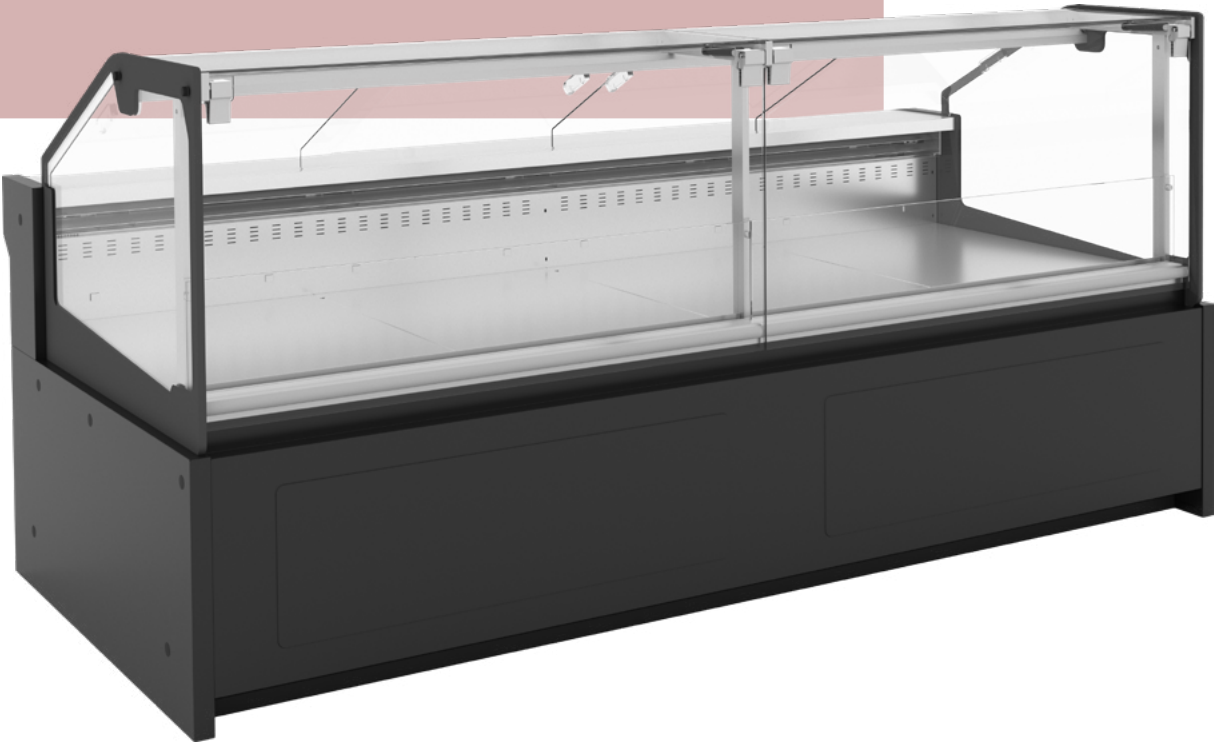

Sectional Drawings


Schnittzeichnungen

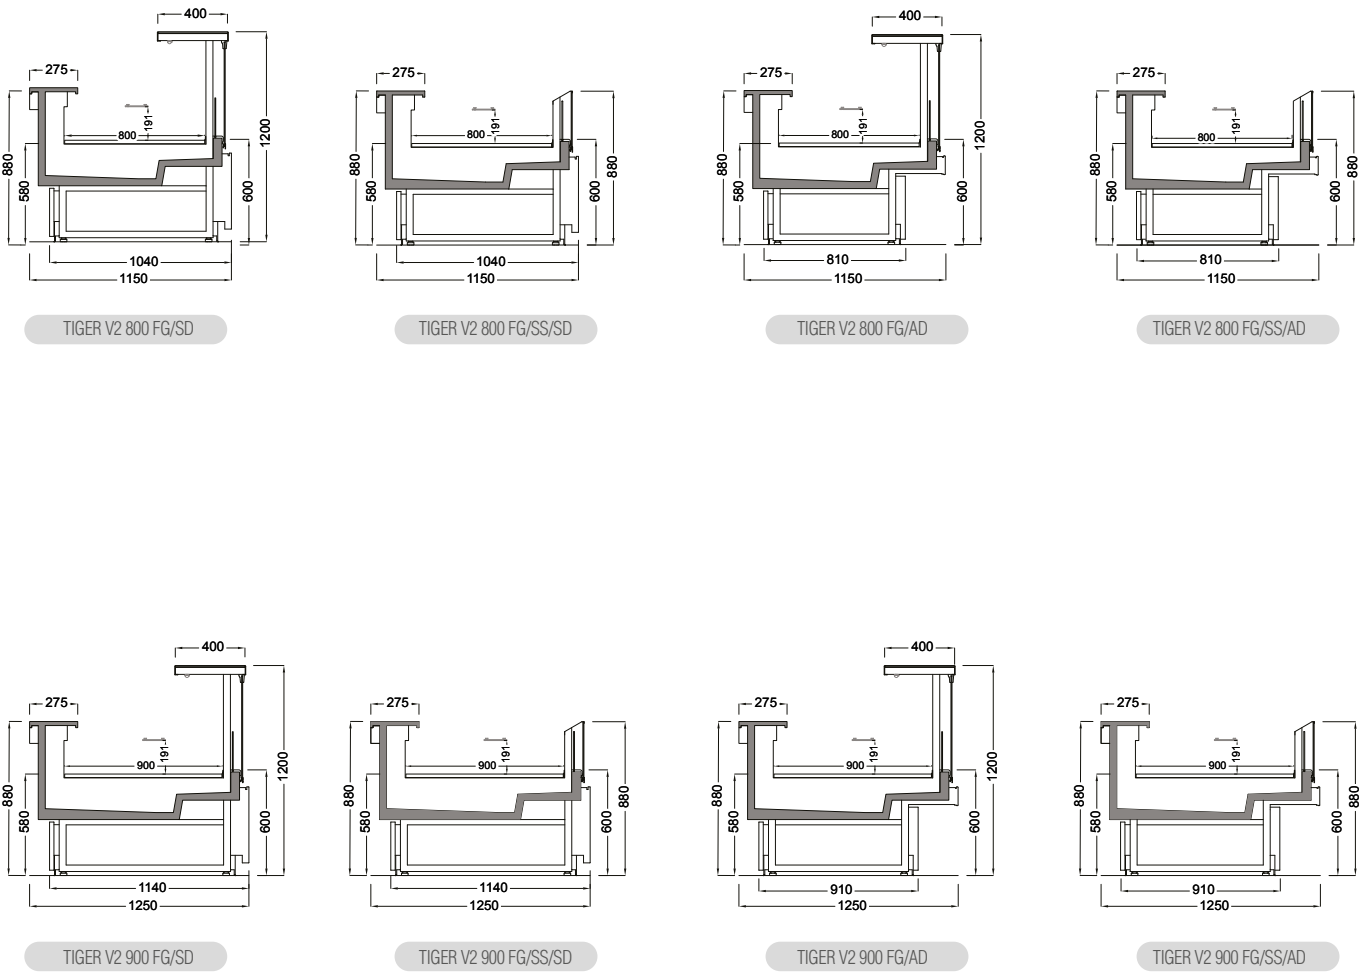


<div> <div>± C°</div> <div>MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)</div> </div>	<div> <div></div> <div>Remote</div> </div>
<div> <div></div> <div>937 1250 1875 2500 3125 3750 IC90° OC90°</div> </div>	<div> <div></div> <div>Off-Cycle Defrost</div> </div>
<div> <div></div> <div>1250</div> </div>	<div> <div></div> <div>N/A</div> </div>
<div> <div></div> <div>1150 1250</div> </div>	<div> <div></div> <div>HFC HFC/HFO Blend CO₂ (R744)</div> </div>
<div> <div></div> <div>40</div> </div>	<div> <div></div> <div>25°C DBT / 60% RH (ISO 23953-2)</div> </div>

Tiger CG


Curve Glass Serve-Over Counter
Bedienungstheke mit Rundgebogenen Glasflächen

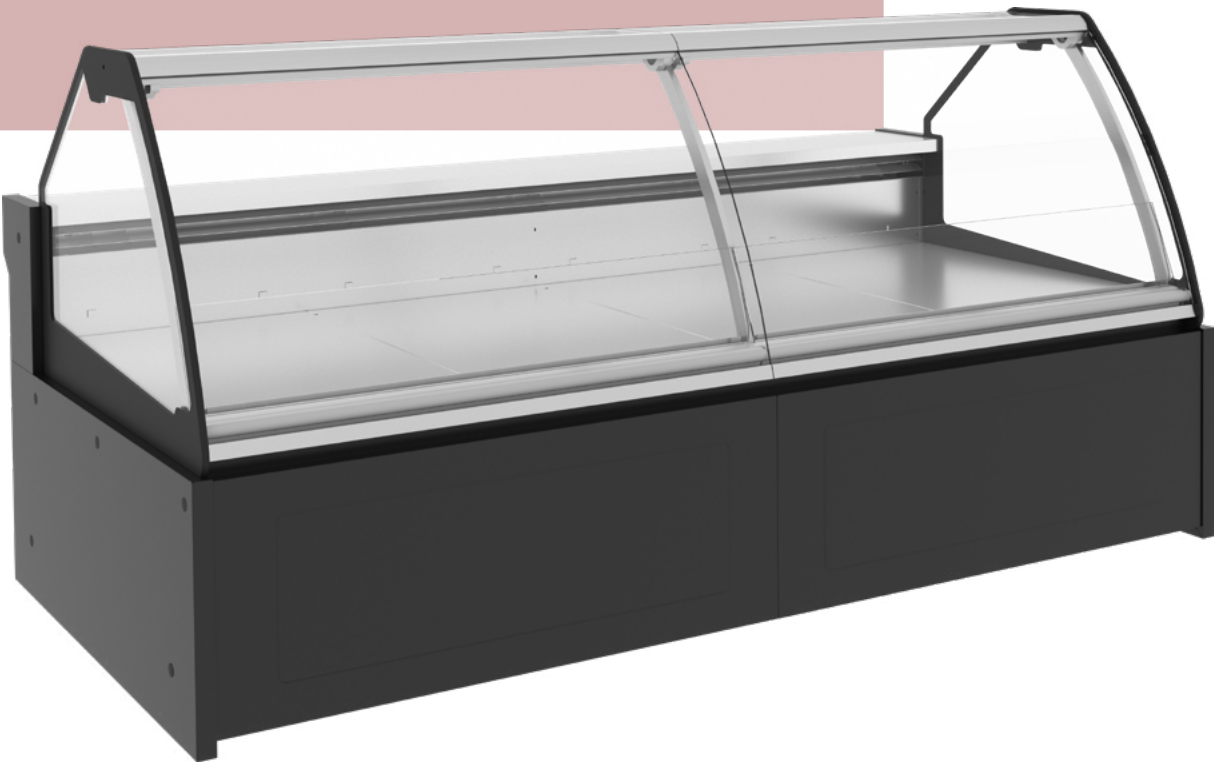


Sectional Drawings Schnittzeichnungen




TIGER V2 800 CG/SD




TIGER V2 800 CG/SS/SD




TIGER V2 800 CG/AD




TIGER V2 800 CG/SS/AD




TIGER V2 900 CG/SD



TIGER V2 900 CG/SS/SD



TIGER V2 900 CG/AD



TIGER V2 900 CG/SS/AD


$\pm$ ° MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Remote
 937 1250 1875 2500 3125 3750 IC90° OC90°	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Tiger PR

Pastry Flat Glass Cabinet Connectable with Counters
Konditorei-Bedienungstheke mit geraden Glasflächen



Sectional Drawings Schnittzeichnungen

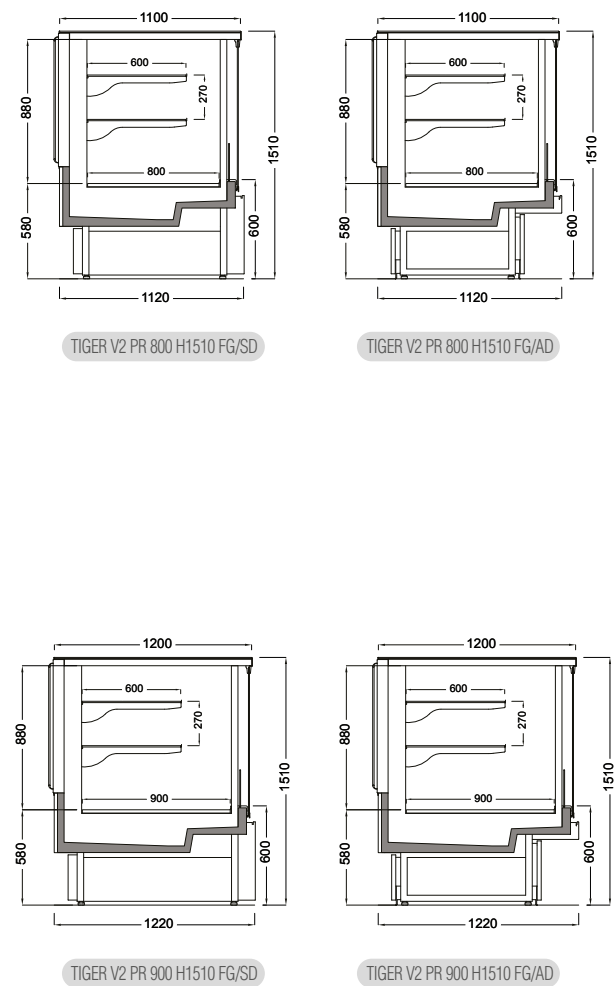


 DP: 3M2 (-1/+7°C)	 Remote
 937 1250 1875	 Off-Cycle Defrost
 1510	 N/A
 1150 1250	 HFC HFC/HFO Blend CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Tiger DP


Semi-Vertical Multi-Deck Cabinet Connectable with Counters
Niedriges Kühlregal mit kombinierbare Bedienungstheke




Sectional Drawings Schnittzeichnungen




TIGER V2 DP 800 H150



TIGER V2 DP 800 H120



TIGER V2 DP 900 H150



TIGER V2 DP 900 H120


$\pm 0^{\circ}$ MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend, CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Tiger BM


Hot Serve-Over Counter Bain-Marie
Warmhaltetheke mit Bain-Marie




Sectional Drawings Schnittzeichnungen




TIGER V2 800 BM CG/SD




TIGER V2 800 BM CG/AD




TIGER V2 800 BM CG/SD




TIGER V2 800 BM CG/AD




TIGER V2 900 BM CG/SD



TIGER V2 900 BM CG/AD



TIGER V2 900 BM FG/SD




TIGER V2 900 BM FG/AD

$\pm C^{\circ}$ HT: Heated	 N/A
 937 1250 1875 2500 3125 3750	 N/A
 1250	 N/A
 1150 1250	 N/A
 40	 N/A

Tiger Tower

Carcase Meat Cabinet Connectable with Counters
Kombinierbare Fleischkühlvitrine für Karkassenfleisch

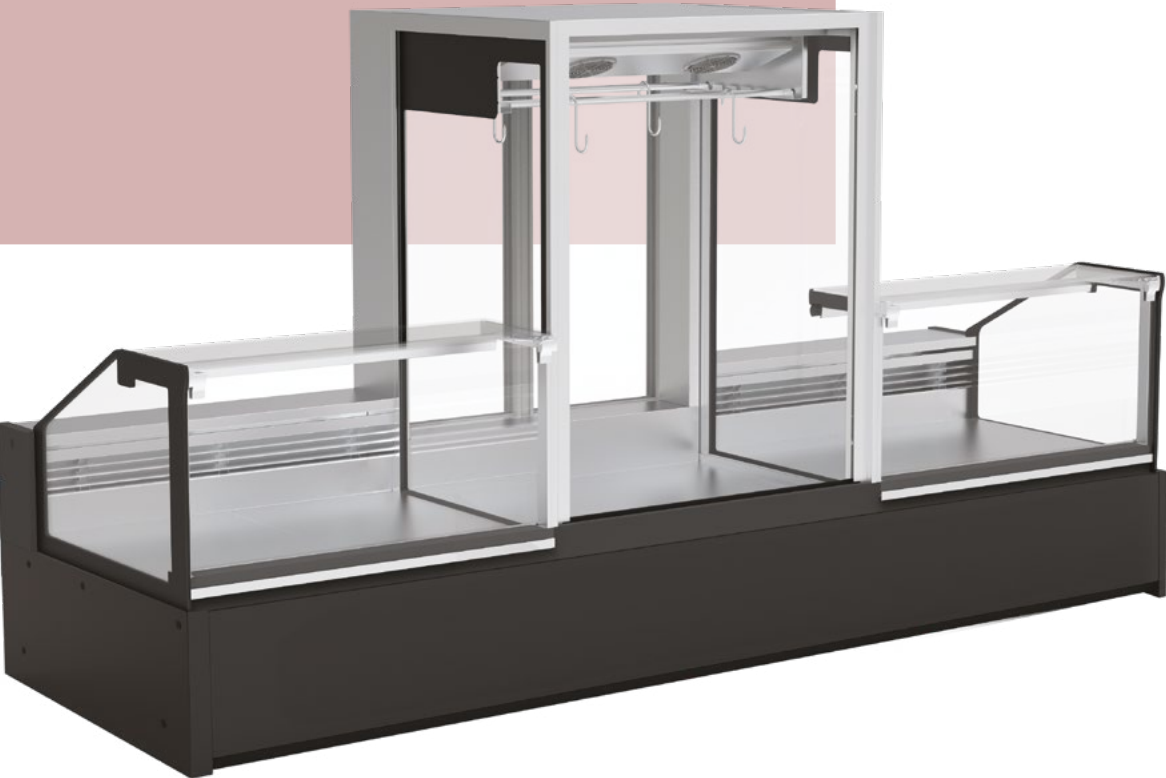

± °C MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

937 | 1250

2150

1150 | 1250

40


Remote

Off-Cycle Defrost

HFC | HFC/HFO Blend | CO₂ (R744)

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

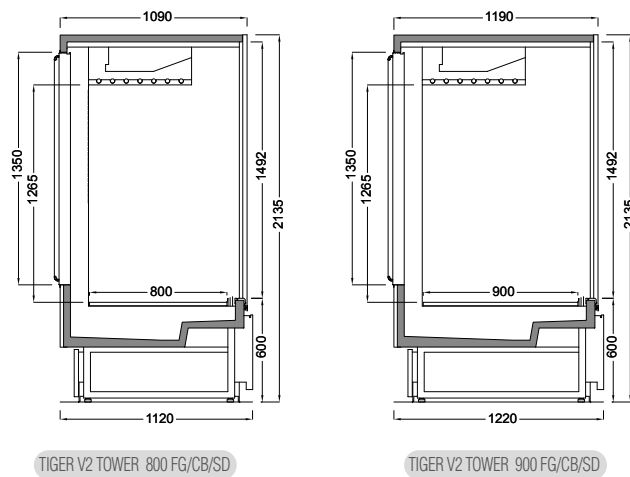

Barracuda

Frozen Flat Glass Serve-Over Counter
Tiefkühltheke mit Geraden Glasflächen



± °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

1250 | 1875 | 2500 | 3125 | 3750

1250

1200

70


Remote

Electric Defrost

HFC | HFC/HFO Blend | CO₂ (R744)


25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri





Kangaroo FG

Flat Glass Serve-Over Counter with Integrated Storage
Geraden Glasflächen-Bedienungstheke mit Kühlreserve

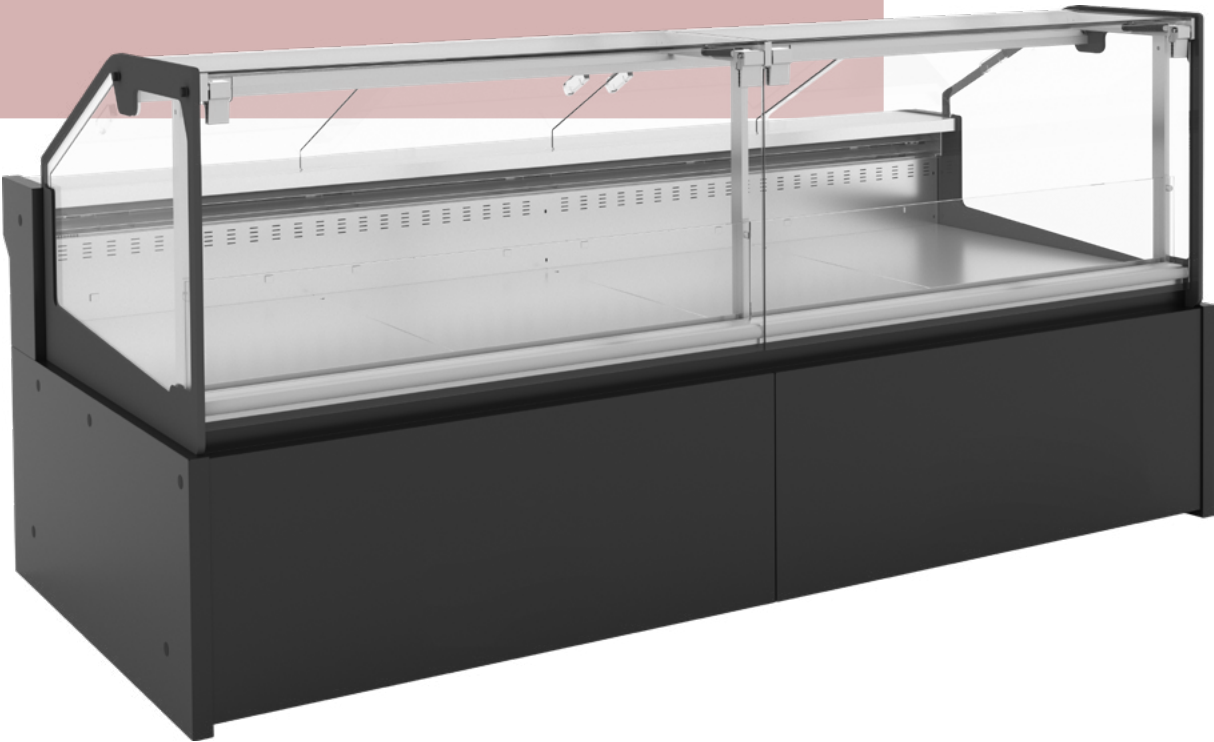


Sectional Drawings Schnittzeichnungen

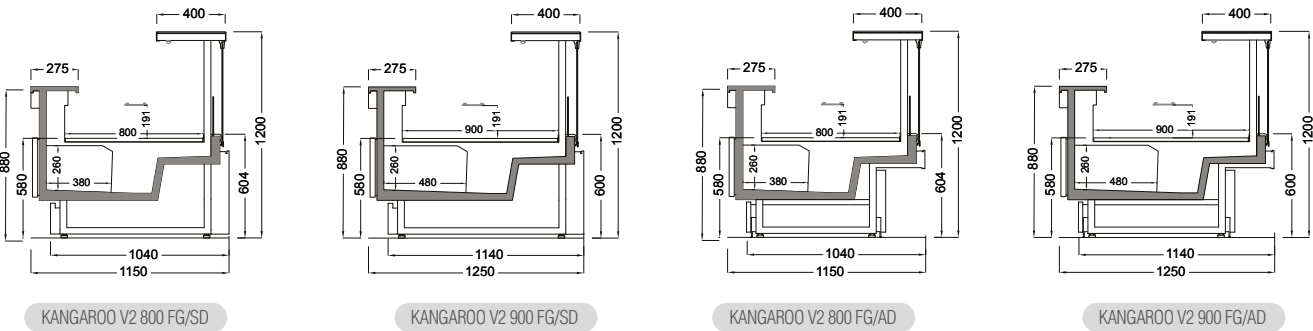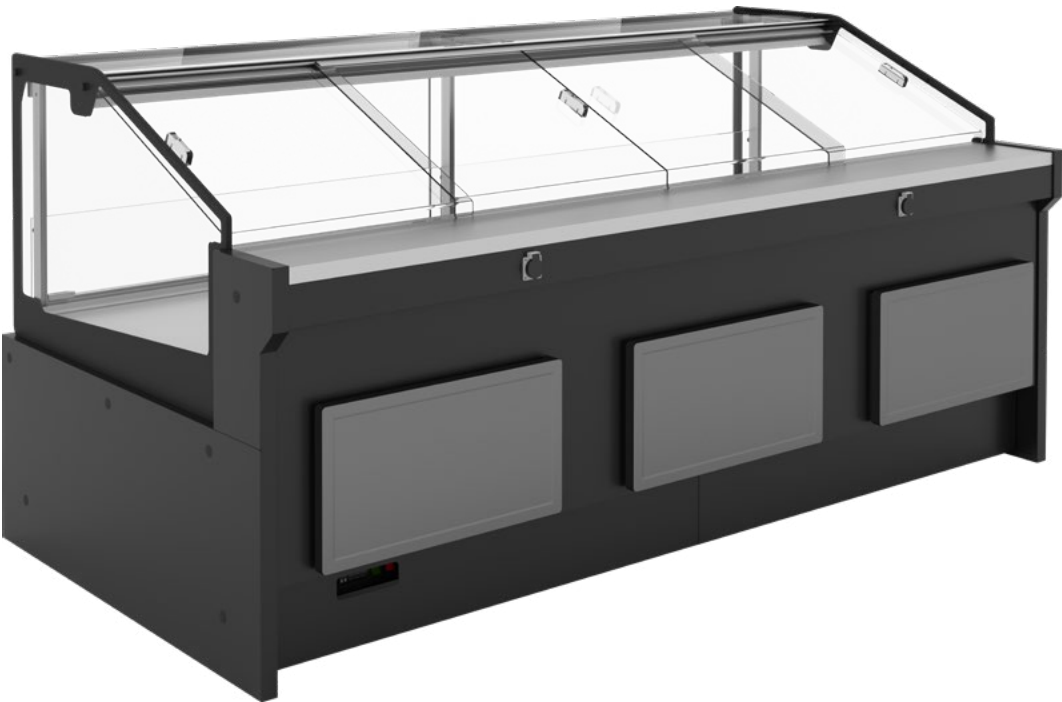


$\pm$ °C MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend, CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

Kangaroo CG

Curve Glass Serve-Over Counter with Integrated Storage
Rundgebogenen Glasflächen-Bedienungstheke mit
Kühlreserve

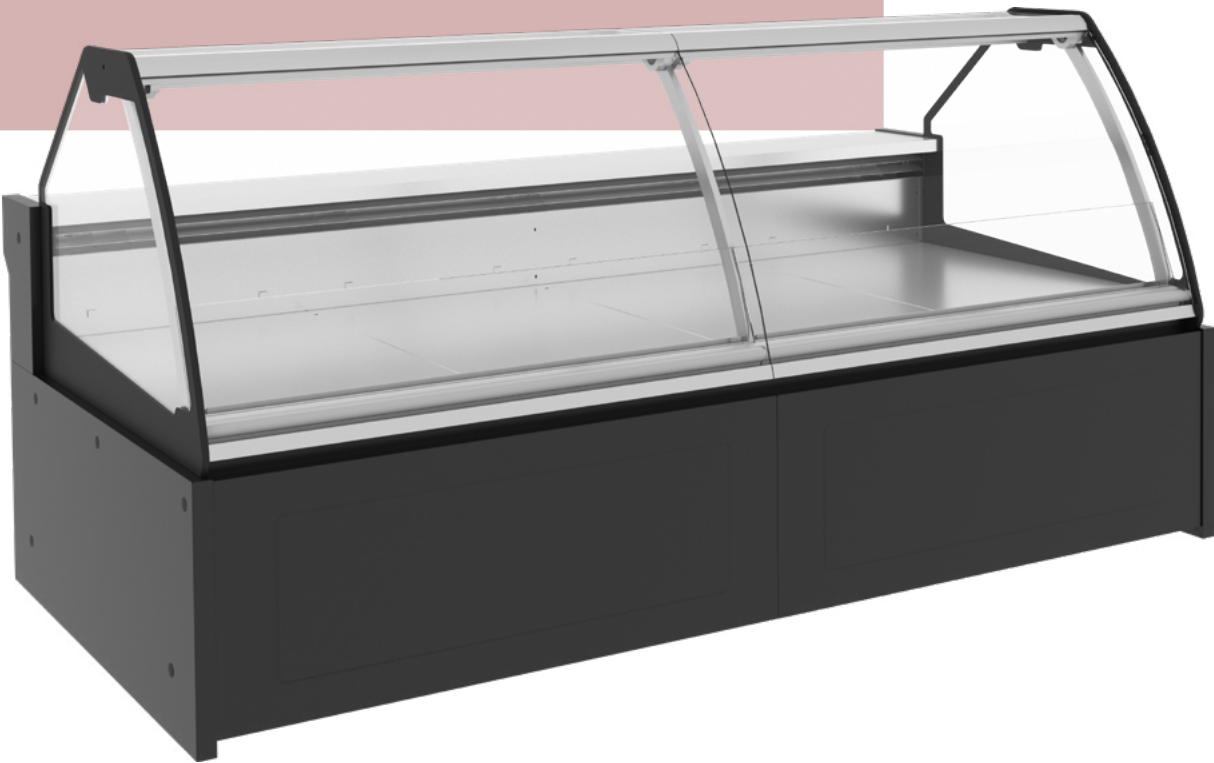


Sectional Drawings Schnittzeichnungen

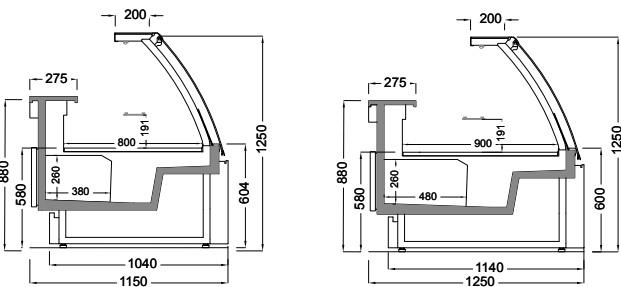

KANGAROO V2 800 CG/SD


KANGAROO V2 900 CG/SD

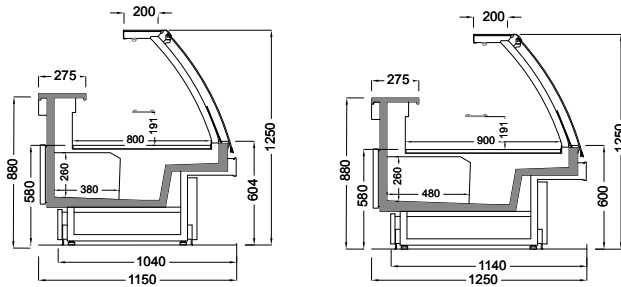

KANGAROO V2 800 CG/AD

KANGAROO V2 900 CG/AD

$\pm$ ° MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Remote
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend, CO ₂ (R744)
 40	 25°C DBT / 60% RH (ISO 23953-2)

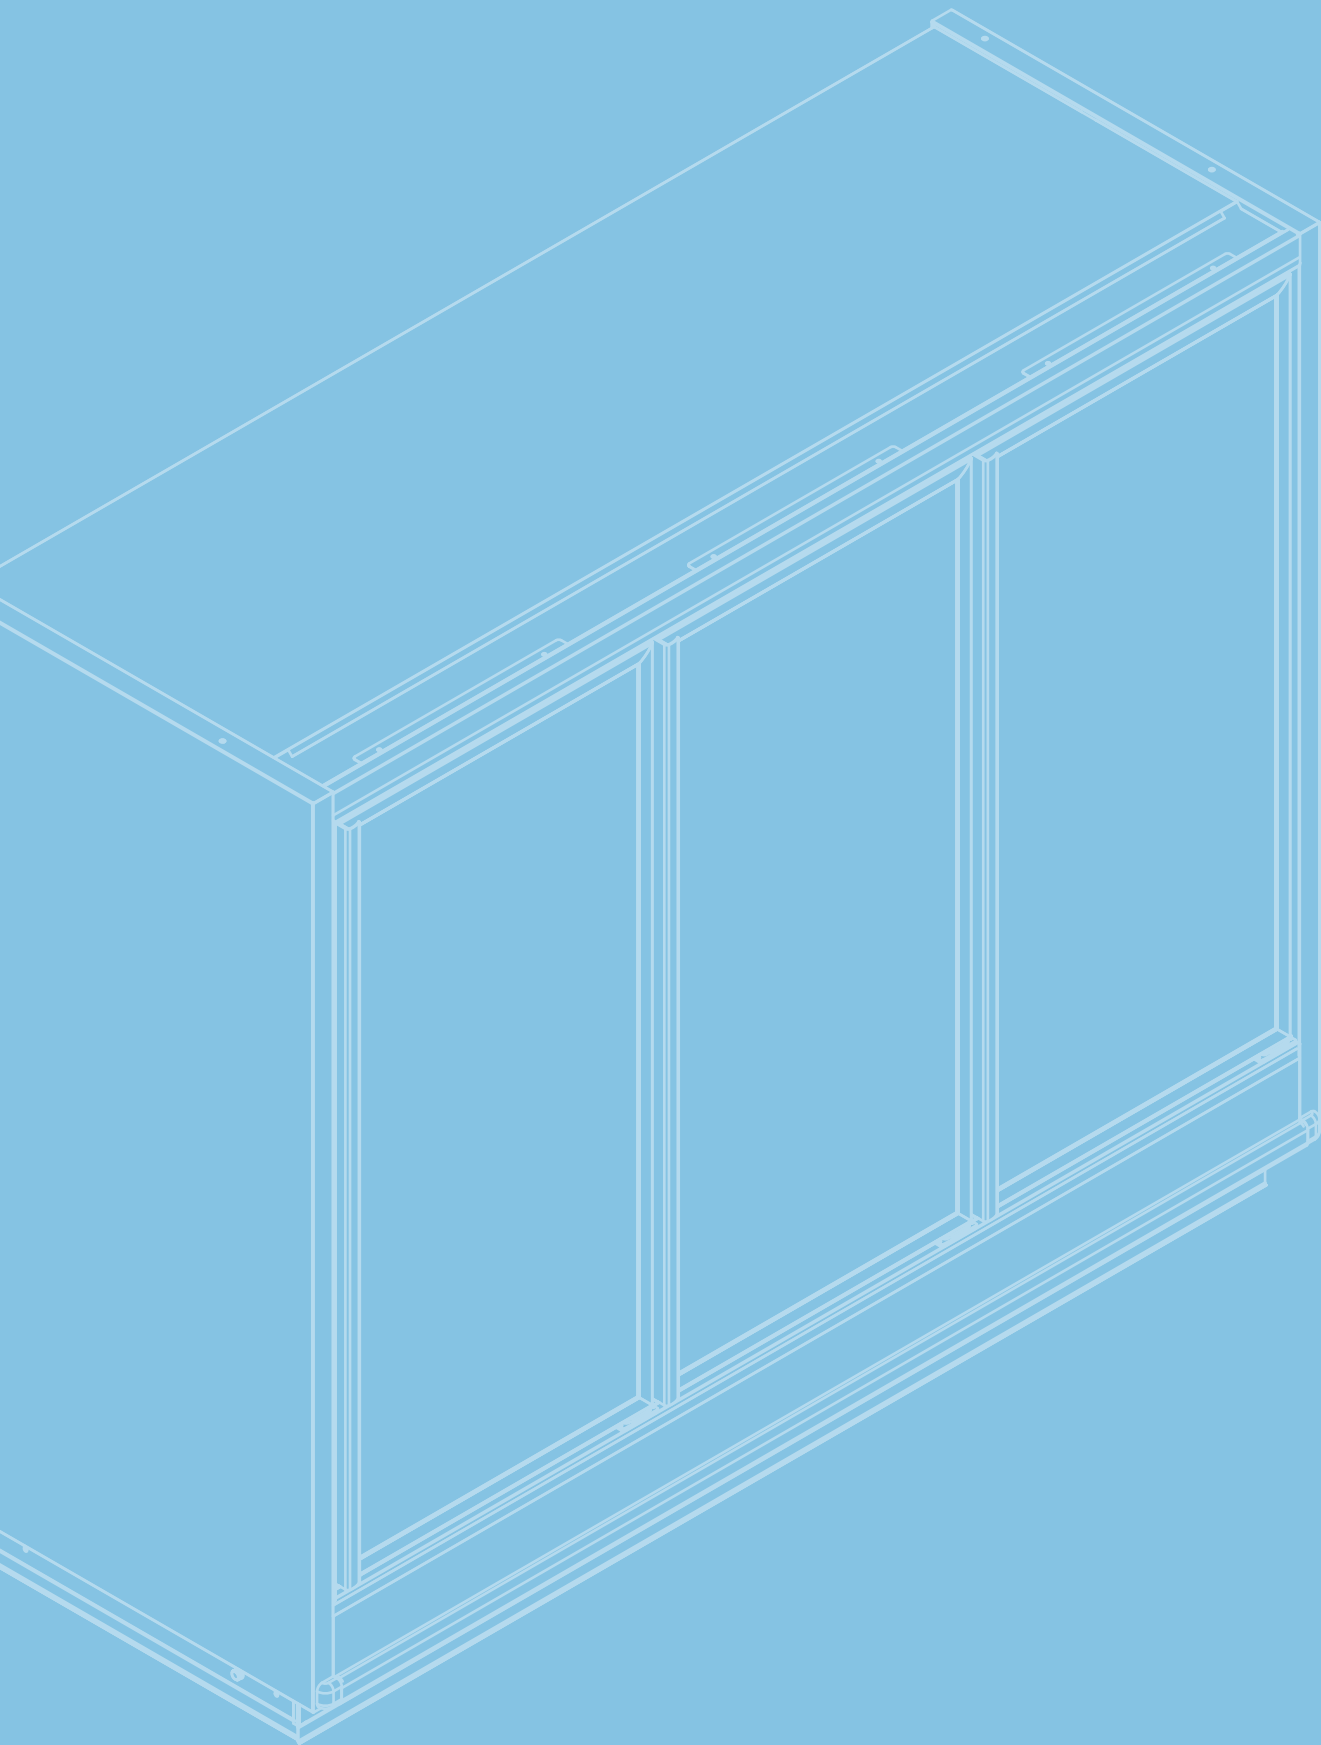

Vertical & Island Freezers

TIEFKÜHLSCHRANK
& TIEFKÜHLINSEL


SCORPION | CAMEL LT | ORCA | WHALE | DOLPHIN

Scorpion


Frozen Full Glass Door Cabinet
Tiefkühlschrank




Sectional Drawings Schnittzeichnungen

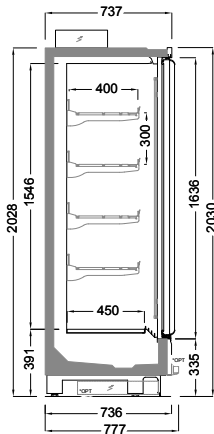


SCORPION V2 75/205

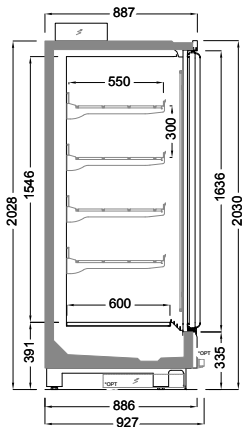


SCORPION V2 90/205

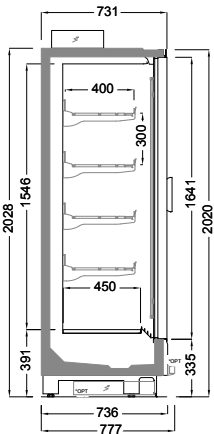


SCORPION V2 SKY/75/205

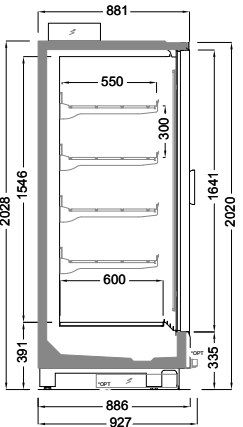


SCORPION V2 SKY/90/205

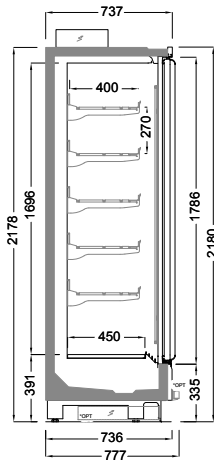


SCORPION V2 75/220

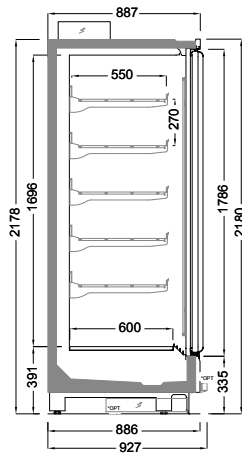

SCORPION V2 90/220

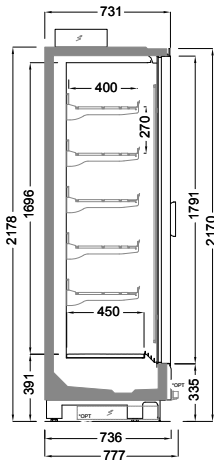

SCORPION V2 SKY/75/220

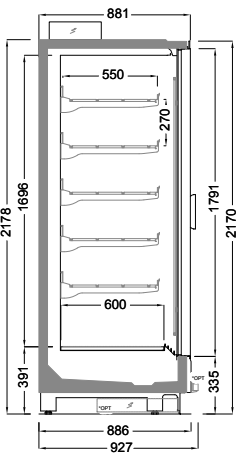

SCORPION V2 SKY/90/220


$\pm$ °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)	 Remote
 795 (1D) 1562 (2D) 2343 (3D) 3124 (4D) 3905 (5D)	 Electric Defrost
 2050 2200	 N/A
 750 900	 HFC, HFC/HFO Blend, CO ₂ (R744)
 50	 25°C DBT / 60% RH (ISO 23953-2)

Camel LT & SKY


Frozen Low Base Full All Glass Door Cabinet
Niedrigsockel-Tiefkühlschrank




Sectional Drawings Schnittzeichnungen

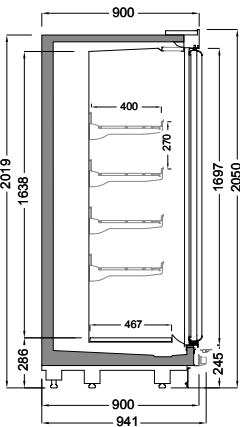


CAMEL LT 90/205

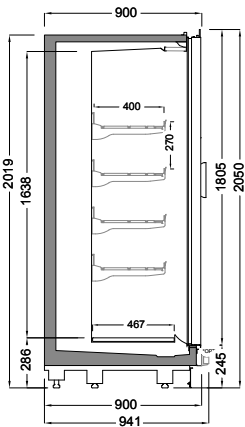

CAMEL LT SKY 90/205

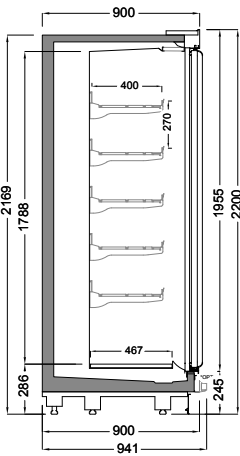

CAMEL LT 90/220

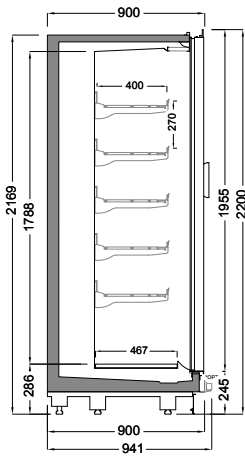

CAMEL LT SKY 90/220

$\pm$ °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)	 Remote
 1562 (2D) 2343 (3D) 3124 (4D) 3905 (5D)	 Electric Defrost
 2050 2200	 N/A
 900	 HFC, HFC/HFO Blend, CO ₂ (R744)
 50	 25°C DBT / 60% RH (ISO 23953-2)

Orca

Frozen Well and Half Glass Door Cabinet
Tiefkühlkombination




Sectional Drawings
Schnittzeichnungen




<div> <div>± C°</div> <div>LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)</div> </div>	<div> <div></div> <div>Remote</div> </div>
<div> <div></div> <div>1250 1875 2500 3750</div> </div>	<div> <div></div> <div>Electric Defrost</div> </div>
<div> <div></div> <div>2050 2200</div> </div>	<div> <div></div> <div>N/A</div> </div>
<div> <div></div> <div>1150</div> </div>	<div> <div></div> <div>HFC, HFC/HFO Blend, CO₂ (R744)</div> </div>
<div> <div></div> <div>50</div> </div>	<div> <div></div> <div>25°C DBT / 60% RH (ISO 23953-2)</div> </div>

Whale


Island Freezer
Tiefkühlinsel

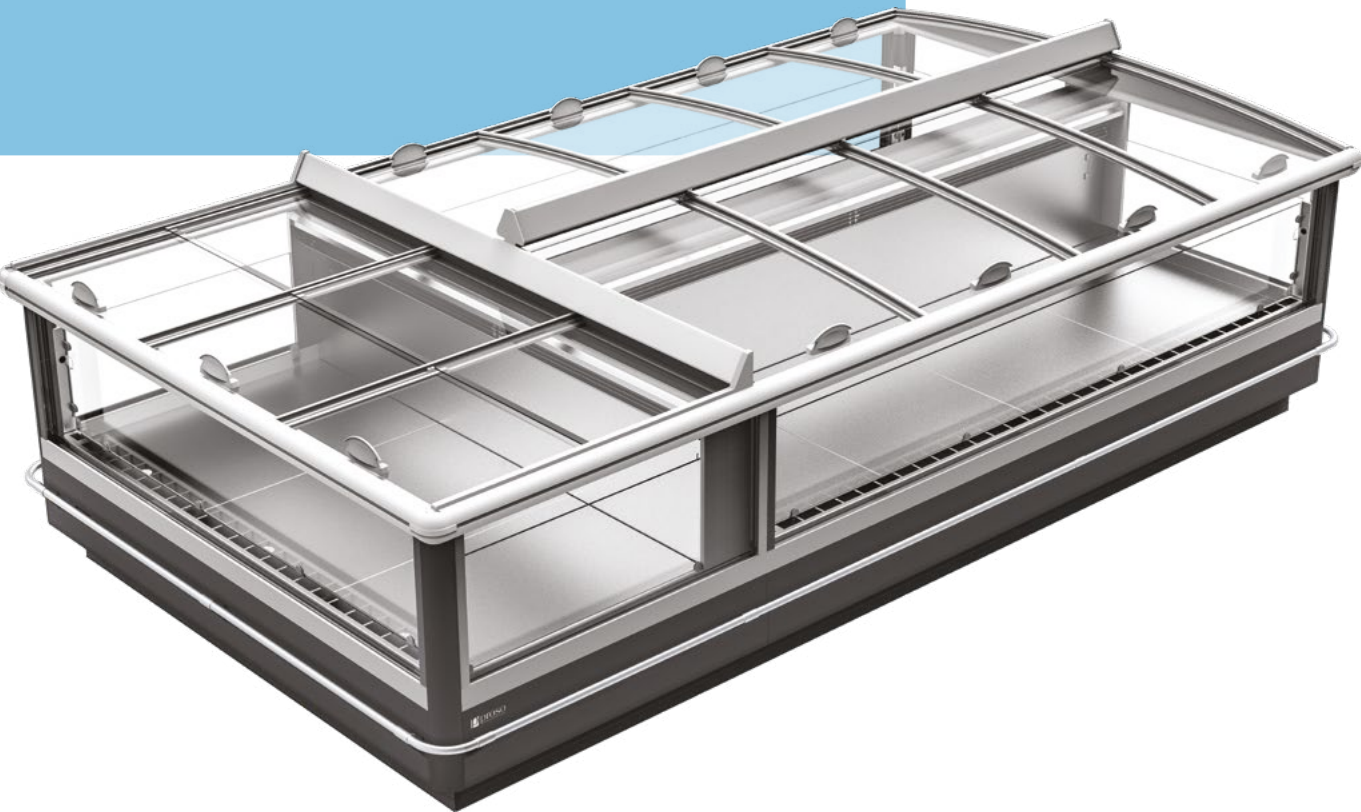


Sectional Drawings Schnittzeichnungen




WHALE G50/150




WHALE G50/150 SLD




WHALE G50/150 PUSH




WHALE G50/200




WHALE G50/200 SLD



WHALE G50/200 PUSH



WHALE HEAD G50/110




WHALE HEAD G50/110 SLD

$\pm$ °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)	 Remote
 1250 1875 2500 3750	 Electric Defrost
 900	 1500 2000
 1500 2000	 HFC, HFC/HFO Blend, CO ₂ (R744)
 60	 25°C DBT / 60% RH (ISO 23953-2)

Dolphin WA

Wall Site Well Only Freezer
Wand-Tiefkühlinsel

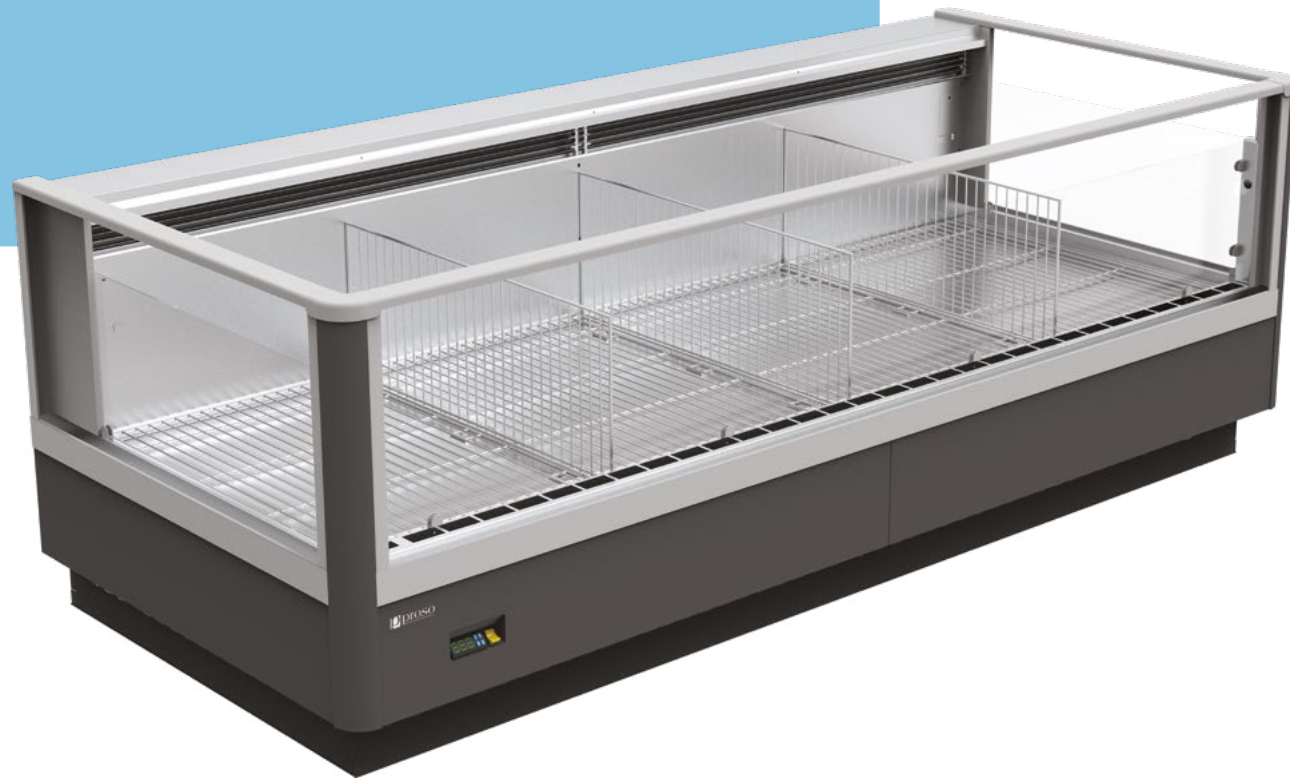

Sectional Drawings Kesit Çizimleri

± °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

1875 | 2500 | 3750

900

1100


60

Remote


Electric Defrost

HFC | HFC/HFO Blend | CO₂ (R744)

25°C DBT / 60% RH (ISO 23953-2)



DOLPHIN WA/G50/110



DOLPHIN WA/G50/110 SLD

Dolphin IS

Well Only Island Freezer
Wannen-Tiefkühlinsel



Sectional Drawings Kesit Çizimleri

± °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

1875 | 2500 | 3750

900

1100


60

Remote


Electric Defrost

HFC | HFC/HFO Blend | CO₂ (R744)

25°C DBT / 60% RH (ISO 23953-2)



DOLPHIN IS/G20/110



DOLPHIN IS/G20/110 SLD



Integral Cabinets


STECKERFERTIGE
KÜHLMÖBEL

OCTOPUS | CRAB | SPIDER | PHOENIX | LOBSTER | RABBIT
| PANTHER | PUMA | WOLF | IGUANA | FOX | LEOPARD |
KANGAROO | BARRACUDA | FALCON

Octopus

Plug-In Well Only Island Freezer

Steckerfertiges Wannen-Tiefkühlinsel

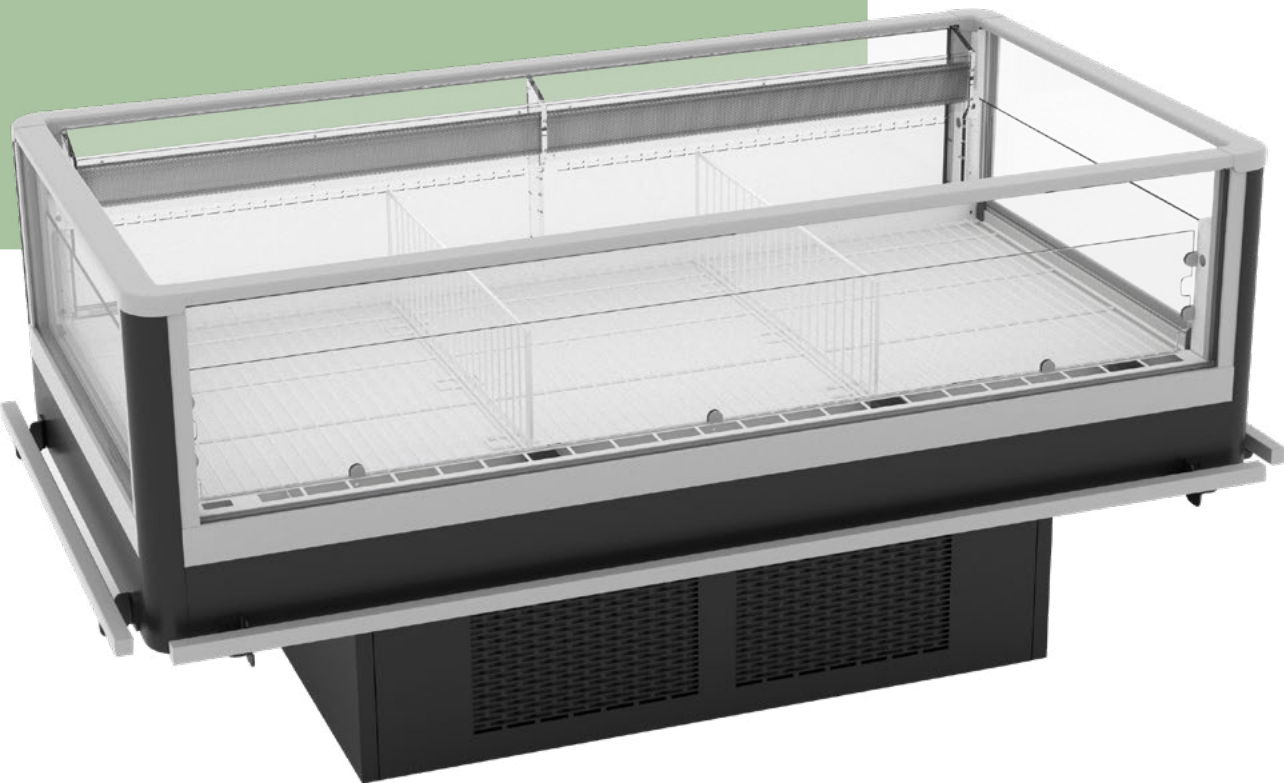

± °C

LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

mm

1380 | 1500 | 2000

mm

950

mm

1100

mm

INC

Plug-in


Electric Defrost

HFC | HFC/HFO Blend | R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings

Kesit Çizimleri




OCTOPUS 110

Octopus SLD

Plug-In Well Only Island Freezer with Glass Lid

Steckerfertiges Wannen-Tiefkühlinsel mit Glasschiebedeckel

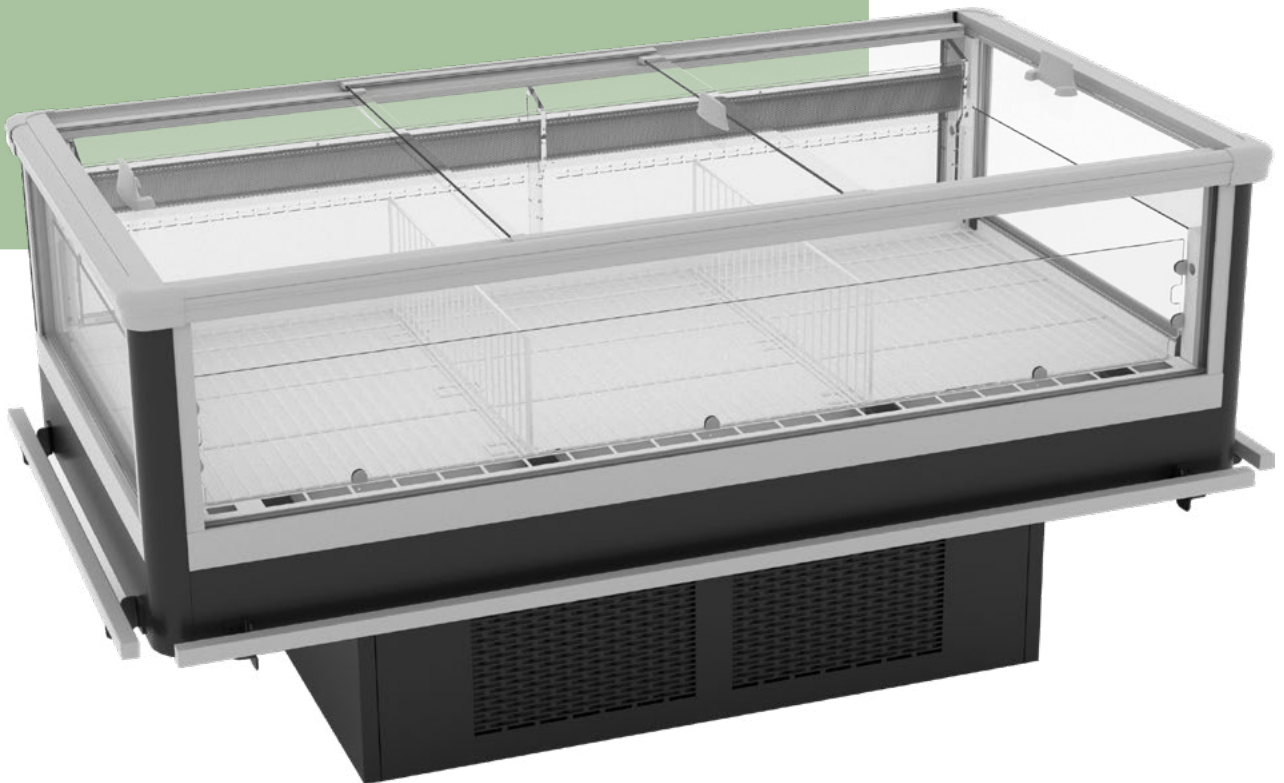

± °C

LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C) | DT: (Dual Temperature)

mm

1380 | 1500 | 2000

mm

950

mm

1100

mm

INC

Plug-in


Electric Defrost

HFC | HFC/HFO Blend | R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings

Kesit Çizimleri



OCTOPUS 110 SLD

Crab

Plug-In Well Only Island Promotion Cabinet
Steckerfertiges Impulsinsel



Sectional Drawings Kesit Çizimleri

± °C MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

1000 | 1250

910

800 | 1050


INC

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)




CRAB OF 1050 R01



CRAB OF 800 R01

Crab SLD

Plug-In Well Only Island Promotion Cabinet with Glass Lid
Steckerfertiges Impulsinsel mit Glasschiebedeckel

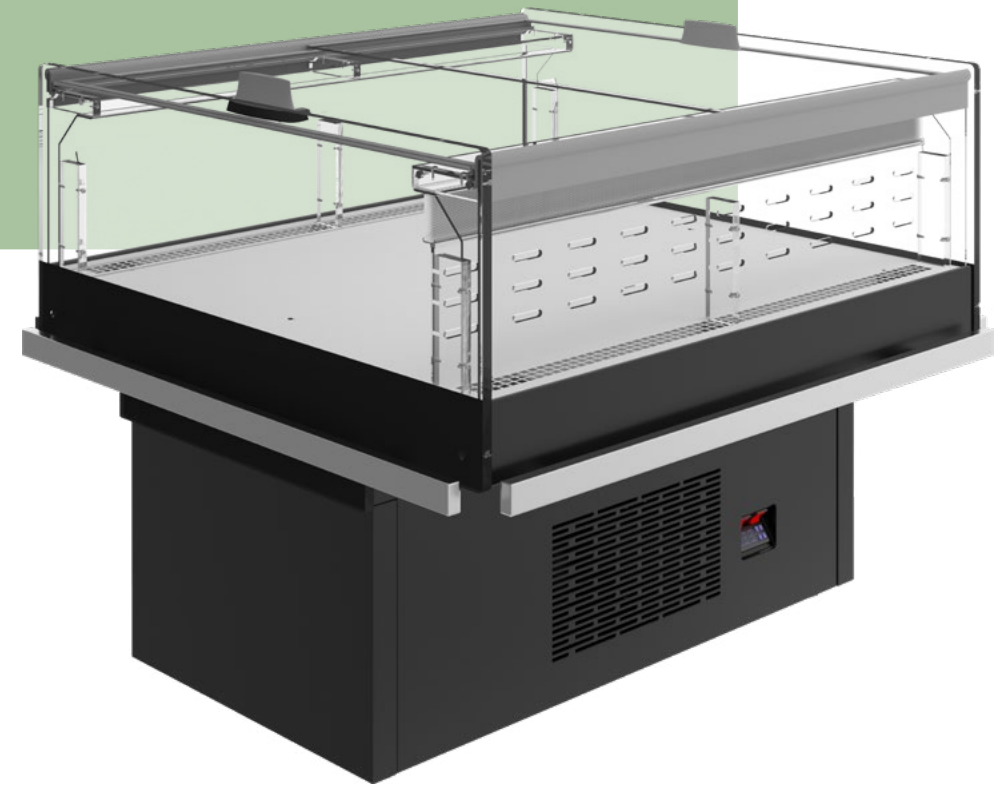

Sectional Drawings Kesit Çizimleri

± °C MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

1000 | 1250

910

800 | 1050


INC

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)



CRAB SLD 1050 R01



CRAB SLD 800 R01

Spider

Plug-In Well Only Island Promotion Cabinet

Steckerfertiges Impulsinsel



± °C

DP: 3M2 (-1/+7°C)

mm

1050 | 1850

mm

950

mm

800 | 1050

mm

INC


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



SPIDER 800



SPIDER 1000

Spider SLD

Plug-In Well Only Island Promotion Cabinet with Glass Lid

Steckerfertiges Impulsinsel mit Glasschiebedeckel



± °C

MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm

1050 | 1850

mm

950

mm

800 | 1050

mm

INC


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



SPIDER SLD 800




SPIDER SLD 1000

Phoenix

Plug-In Open Front Semi-Vertical Cabinet

Steckerfertiges Offenes Niedriges Kühlregal

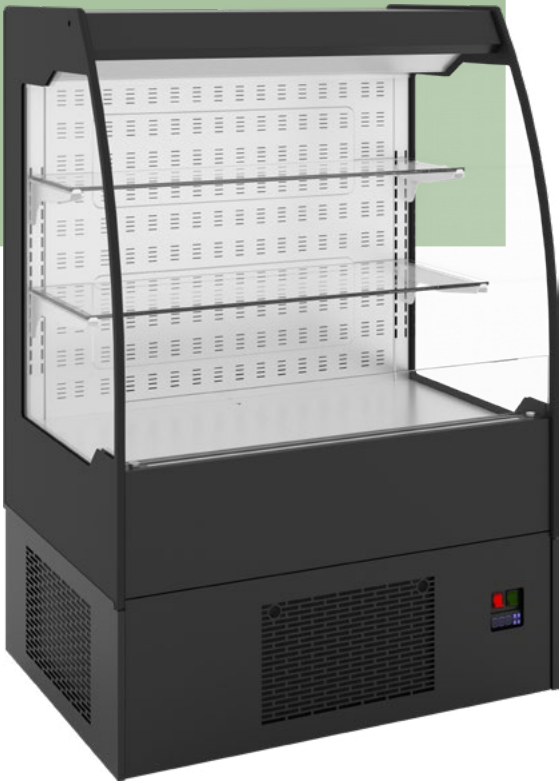

± °C

DP: 3M2 (-1/+7°C)

mm

730 | 970 | 1280

mm

1500

mm

750 | 900

mm

INC

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290


25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings

Kesit Çizimleri



PHOENIX V2 OF 75 H150




PHOENIX V2 OF 90 H150

Phoenix SLD

Plug-In Semi-Vertical Cabinet with Sliding Door

Steckerfertiges Niedriges Kühlregal mit Schiebetüren

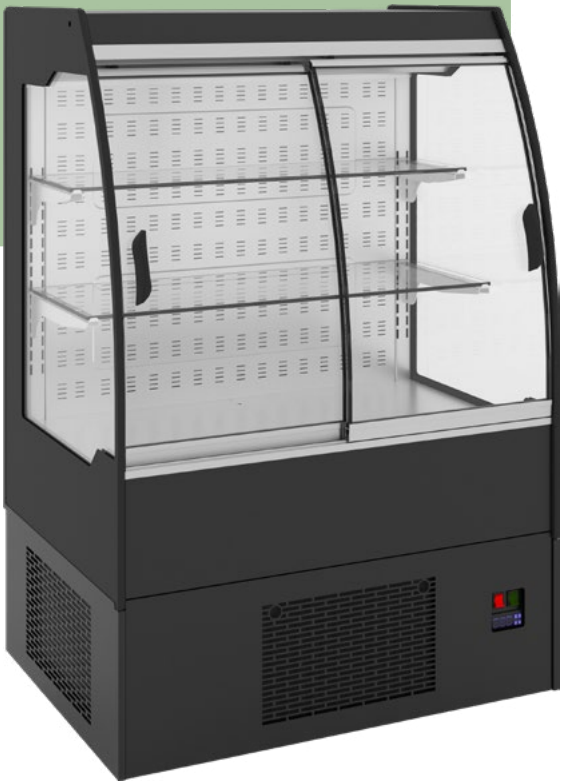

± °C

MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm

730 | 970 | 1280

mm

1500

mm

750 | 900

mm

INC

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290


25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings

Kesit Çizimleri



PHOENIX V2 SLD 75 H150



PHOENIX V2 SLD 90 H150

Phoenix SKY

Plug-In Semi-Vertical Cabinet with Hinged Door
Steckerfertiges Niedriges Kühlregal mit Schiebetüren



± °C MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm 970 | 1280

mm 1500

mm 750 | 900

mm INC


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



PHOENIX V2 SKY 75 H150



PHOENIX V2 SKY 90 H150

Lobster

Plug-In Double Sided Semi-Vertical Cabinet
Steckerfertiges Niedriges Kühlregal, Beidseitig



± °C MT: 3M1 (-1/+5 °C) | DP: 3M2 (-1/+7 °C)

mm 1250 | 1875 | 2500

mm 1350

mm 1460

mm 30

Plug-in


Off-Cycle Defrost

1460


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



LOBSTER DUO 1460 H135



LOBSTER HEAD H135

Rabbit

Plug-In Beverages and Pastry Combined Cabinet
Steckerfertige Kombi-Kühlvitrine für Getränke und Konditoreiwaren



± ° DP: 3M2 (-1/+7°C)

mm 800 | 1020 | 1330

mm 1450

mm 900

mm INC


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



RABBIT PR/PR 90/150

Rabbit SS

Plug-In Beverages and Pastry Combined Self-Service Cabinet
Steckerfertige Kombi-SB-Kühlvitrine für Getränke und Konditoreiwaren



± ° DP: 3M2 (-1/+7°C)

mm 800 | 1020 | 1330

mm 1450

mm 900

mm INC


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



RABBIT V2 PR/SS 90/150

Panther OF

Plug-In Open Front Multi-Deck Cabinet
Steckerfertiges Offenes Wandkühlregal



Sectional Drawings Kesit Çizimleri

± ° DP: 3M2 (-1/+7°C) | FV: 3H1 (+1/+10°C)

937 | 1250 | 1875 | 2500

2050

750


40

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

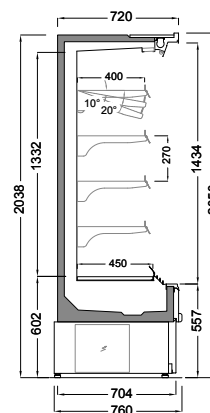

PANTHER V2 OF/75/205

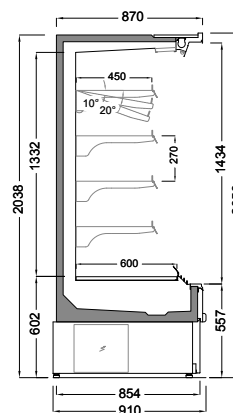

PANTHER V2 OF/90/205

Panther CF

Plug-In Glass Door Multi-Deck Cabinet
Steckerfertiges Wandkühlregal mit Drehtür



Sectional Drawings Kesit Çizimleri

± ° MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C) |
FV: 3H1 (+1/+10°C)

937 | 1250 | 1875 | 2500

2050

750


40

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

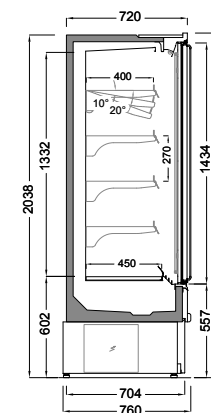

PANTHER V2 CF/75/205

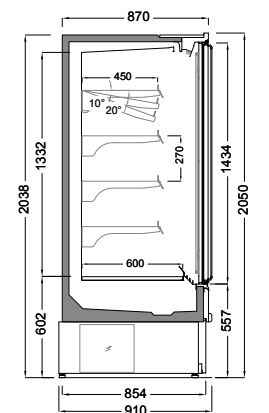

PANTHER V2 CF/90/205

Puma OF

Plug-In Open Front Multi-Deck Cabinet
Steckerfertiges Offenes Wandkühlregal



± ° MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C) |
FV: 3H1 (+1/+10°C)

mm 937 | 1250 | 1875 | 2500

mm 2050

mm 800

mm 40


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

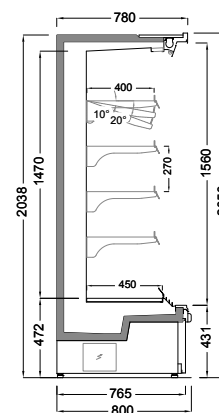

PUMA V2 OF/75/205

Puma CF

Plug-In Glass Door Multi-Deck Cabinet
Steckerfertiges Wandkühlregal mit Drehtür



± ° MX: 3M0 (-1/+4°C) | MT: 3M1 (-1/+5°C) |
DP: 3M2 (-1/+7°C) | FV: 3H1 (+1/+10°C)

mm 937 | 1250 | 1875 | 2500

mm 2050

mm 800

mm 40


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

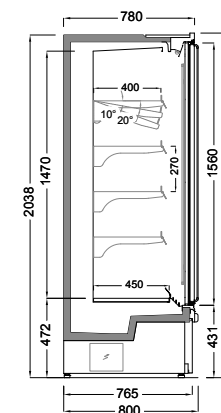

PUMA V2 CF/75/205

Wolf CF

Plug-In Glass Door Low Base Multi-Deck Cabinet
Steckerfertiges Niedrigsockel-Wandkühlregal mit Drehtür



- ± °C

MX: 3M0 (-1/+4°C) | MT: 3M1 (-1/+5°C) |
DP: 3M2 (-1/+7°C) | FV: 3H1 (+1/+10°C)

mm

937 | 1250 | 1875 | 2500

mm

2050

mm

750

mm

40


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

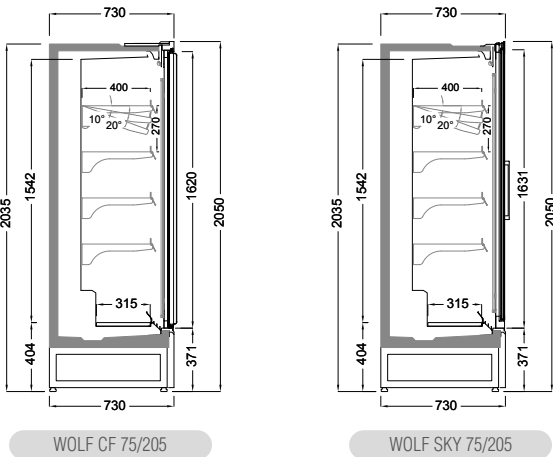

Wolf LT

Plug-In Frozen Low Base Full Glass Door Cabinet
Steckerfertiges Niedrigsockel-Tiefkühlschrank



- ± °C

LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

mm

937 | 1250 | 1875 | 2500

mm

2050

mm

750

mm

50


Plug-in

Electric Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

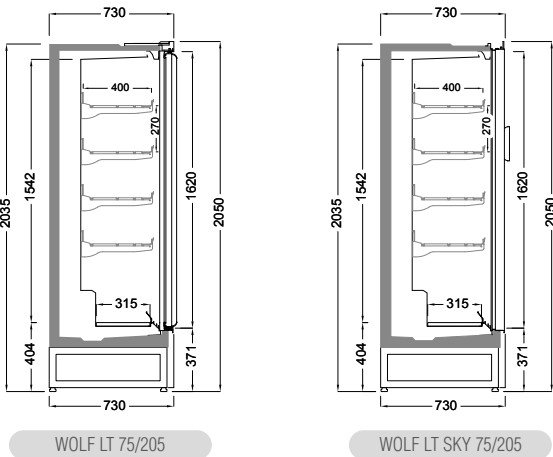

Iguana

Plug-In Frozen Full Glass Door Cabinet
Steckerfertiges Tiefkühlschrank



± °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

mm 1250 | 1875 | 2500

mm 2050

mm 750

mm 50


Plug-in

Electric Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)


Sectional Drawings Kesit Çizimleri

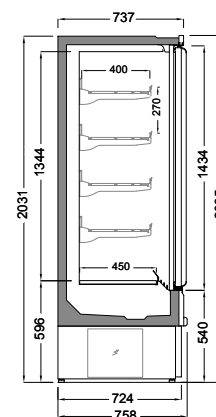

IGUANA V2 75/205

Fox

Plug-In Open Front Low Height Multi-Deck Cabinet
Steckerfertiges Niedriges Kühlregal

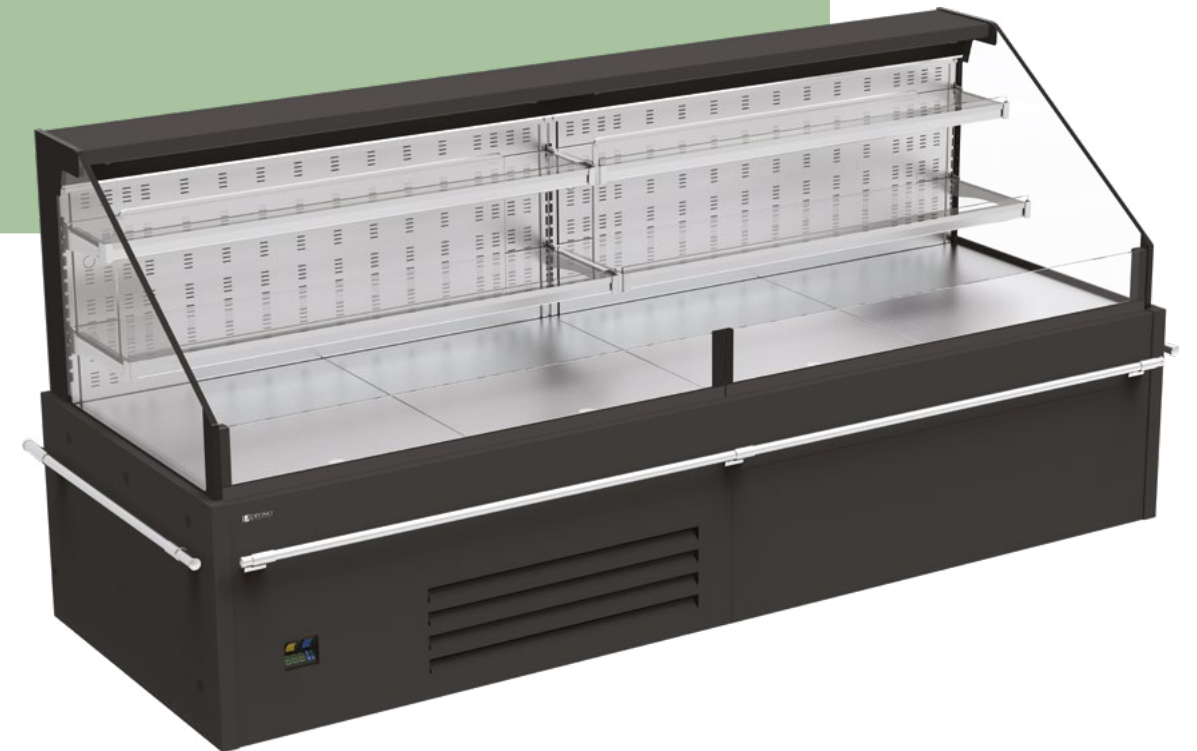

± °C MX: 3M0 (-1/+4°C) | MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm 937 | 1250 | 1875 | 2500 | 3750

mm 1170

mm 900

mm 40


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)


Sectional Drawings Kesit Çizimleri




FOX V2 90/117

Leopard FG


Plug-In Flat Glass Serve-Over Counter
Steckerfertiges Bedienungstheke mit Geraden Glasflächen

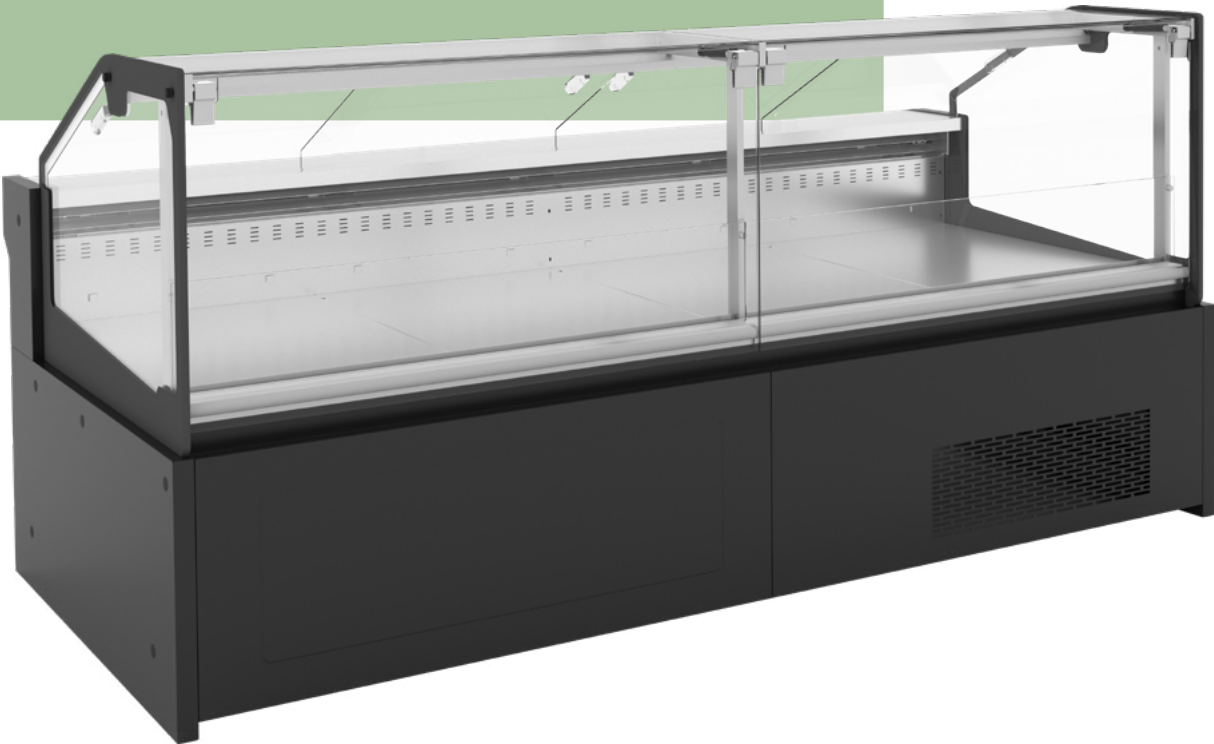


Sectional Drawings Schnittzeichnungen




LEOPARD V2 800 FG/SD




LEOPARD V2 800 FG/SS/SD




LEOPARD V2 800 FG/AD




LEOPARD V2 800 FG/SS/AD




LEOPARD V2 900 FG/SD



LEOPARD V2 900 FG/SS/SD



LEOPARD V2 900 FG/AD




LEOPARD V2 900 FG/SS/AD


$\pm 0^{\circ}$ MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Plug-in
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend, R290
 40	 25°C DBT / 60% RH (ISO 23953-2)

Leopard CG


Plug-In Flat Glass Serve-Over Counter
Steckerfertiges Bedienungstheke mit Rundgebogenen Glasflächen

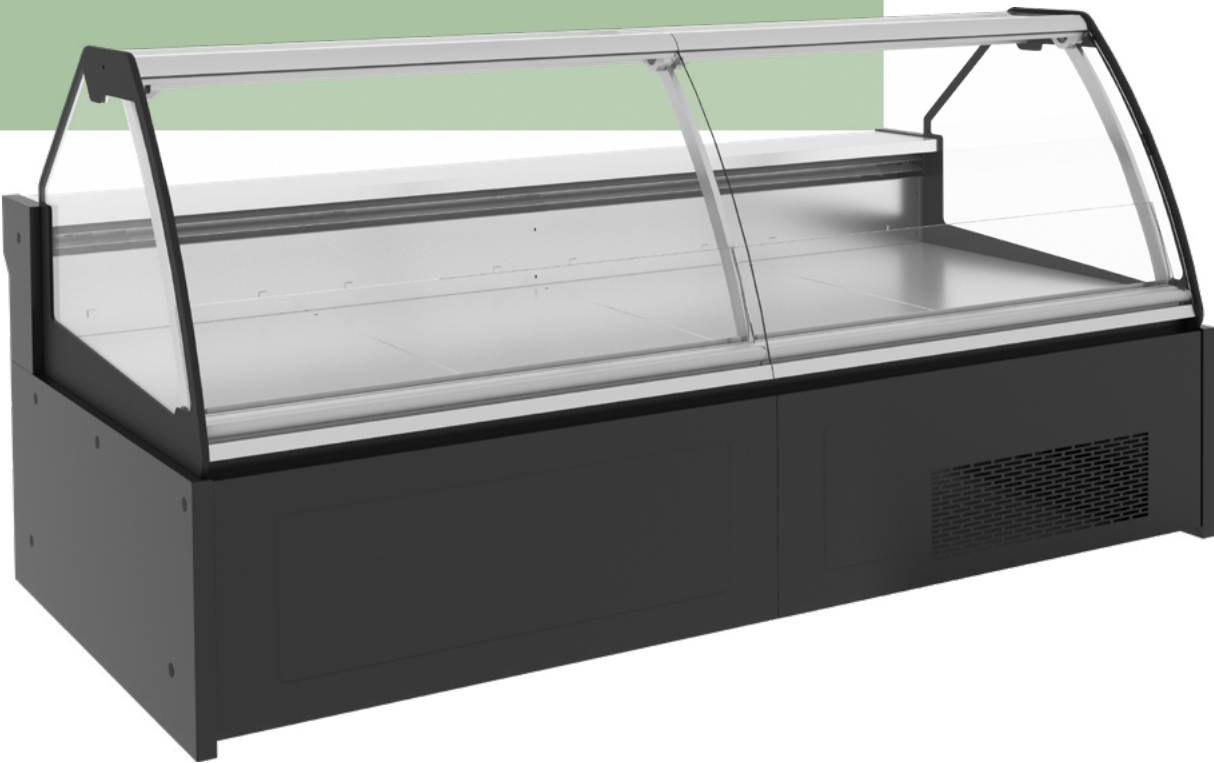


Sectional Drawings Schnittzeichnungen




LEOPARD V2 800 CG/SD




LEOPARD V2 800 CG/SS/SD




LEOPARD V2 800 CG/AD




LEOPARD V2 800 CG/SS/AD




LEOPARD V2 900 CG/SD



LEOPARD V2 900 CG/SS/SD



LEOPARD V2 900 CG/AD



LEOPARD V2 900 CG/SS/AD


$\pm$ ° MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Plug-in
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend, R290
 40	 25°C DBT / 60% RH (ISO 23953-2)

Leopard DP


Plug-in Semi-Vertical Multi-Deck Cabinet
Connectable with Counters
Steckerfertiges Niedriges Kühlregal mit kombinierbare
Bedienungstheke




Sectional Drawings Schnittzeichnungen




Leopard V2 DP 800 H150



Leopard V2 DP 800 H120



Leopard V2 DP 900 H150



Leopard V2 DP 900 H120


$\pm 0^{\circ}$ MT: 3M1 (-1/+5°C) DP: 3M2 (-1/+7°C)	 Plug-in
 937 1250 1875 2500 3125 3750	 Off-Cycle Defrost
 1250	 N/A
 1150 1250	 HFC, HFC/HFO Blend
 40	 25°C DBT / 60% RH (ISO 23953-2)

Leopard PR


Plug-in Pastry Flat Glass Cabinet Connectable with Counters
Steckerfertiges Konditorei-Bedienungstheke mit geraden Glasflächen




Sectional Drawings Schnittzeichnungen




LEOPARD V2 PR 800 H1510 FG/SD



LEOPARD V2 PR 800 H1510 FG/AD



LEOPARD V2 PR 900 H1510 FG/SD




LEOPARD V2 PR 900 H1510 FG/AD

 DP: 3M2 (-1/+7°C)	 Plug-in
 937 1250 1875	 Off-Cycle Defrost
 1510	 N/A
 1150 1250	 HFC, HFC/HFO Blend
 40	 25°C DBT / 60% RH (ISO 23953-2)

Kangaroo FG PI

Plug-In Flat Glass Serve-Over Counter with Integrated Storage
Steckerfertiges Geraden Glasflächen-Bedienungstheke mit Kühlreserve

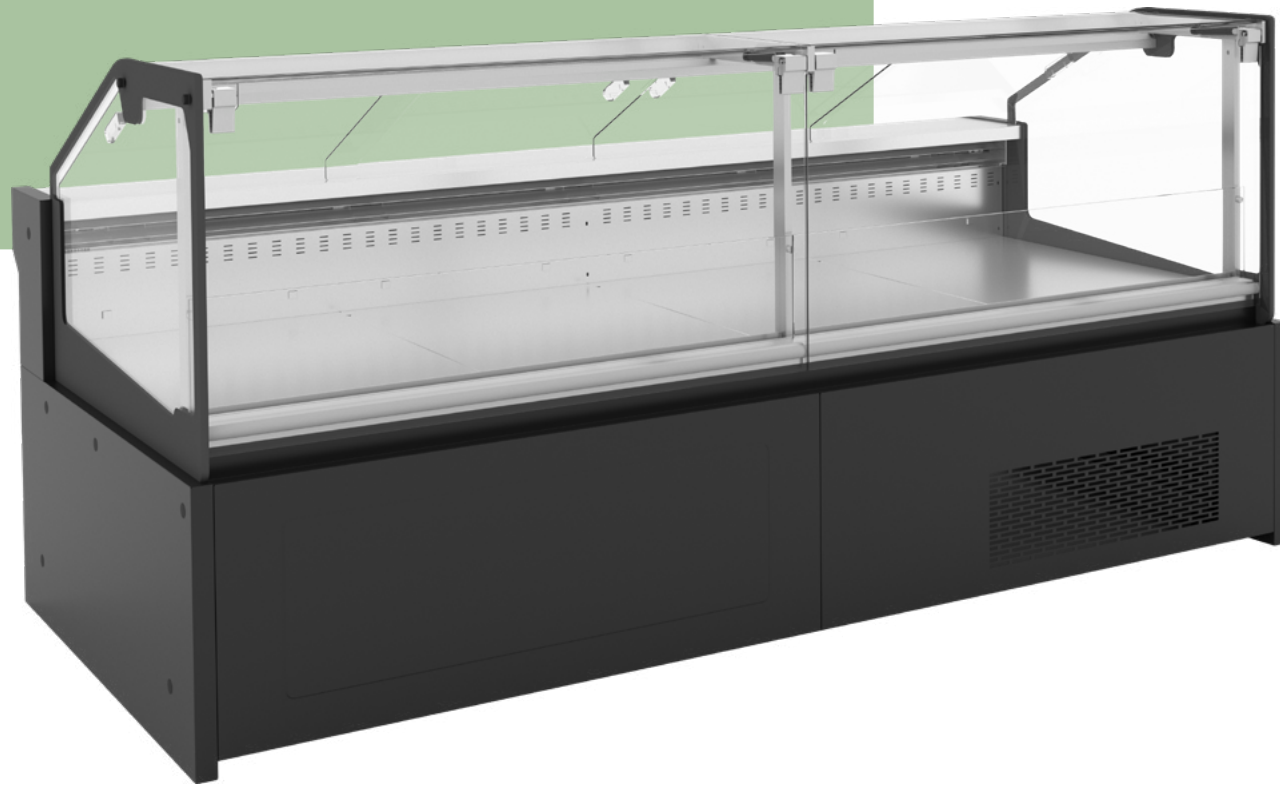

Sectional Drawings Kesit Çizimleri

± ° MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm 937 | 1250 | 1875 | 2500 | 3125 | 3750

mm 1250

mm 1150 | 1250


mm 40

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)




KANGAROO V2 800 FG/SD



KANGAROO V2 900 FG/SD

Kangaroo CG PI

Plug-In Curve Glass Serve-Over Counter with Integrated Storage
Steckerfertiges Rundgebogenen Glasflächen-Bedienungstheke mit Kühlreserve

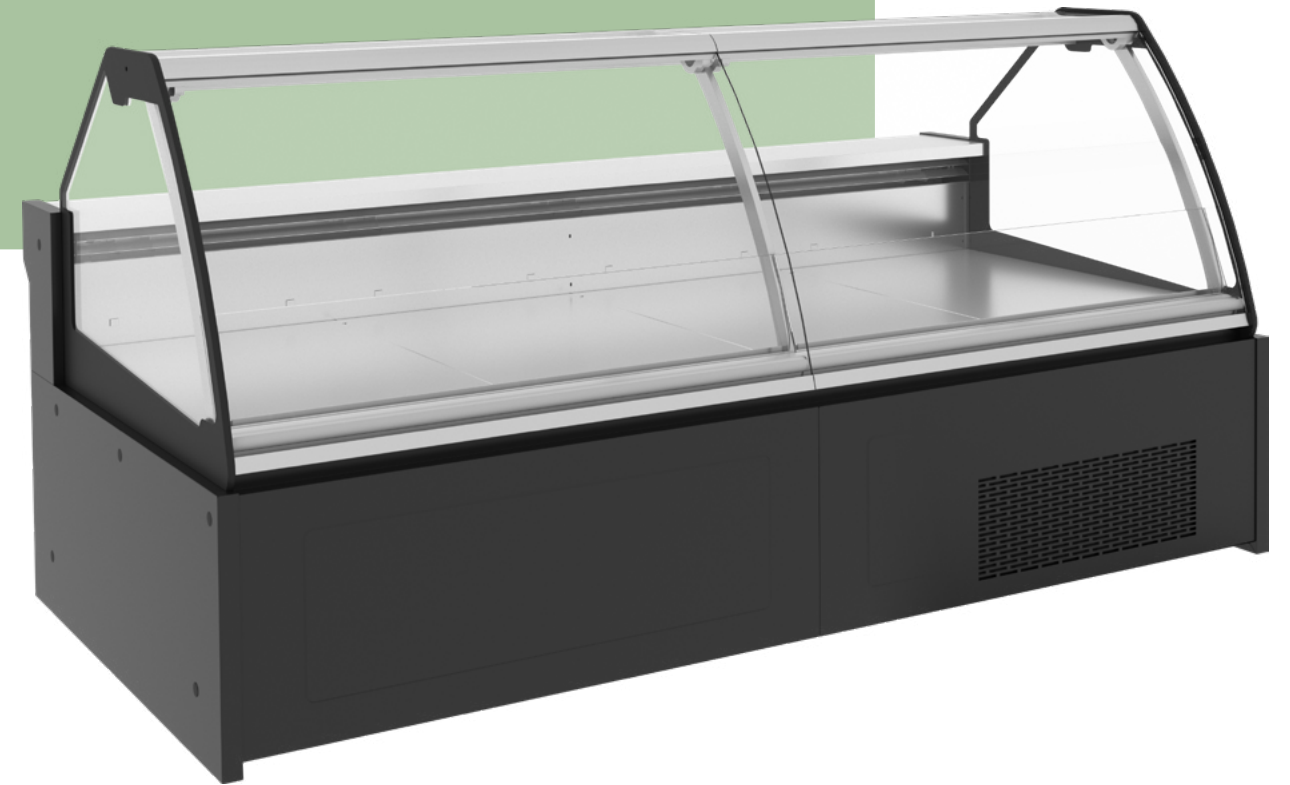

Sectional Drawings Kesit Çizimleri

± ° MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

mm 937 | 1250 | 1875 | 2500 | 3125 | 3750

mm 1250

mm 1150 | 1250


mm 40

Plug-in


Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)




KANGAROO V2 800 CG/SD



KANGAROO V2 900 CG/SD

Barracuda PI

Plug-in Frozen Flat Glass Serve-Over Counter
Steckerfertiges Tiefkühltheke mit Geraden Glasflächen

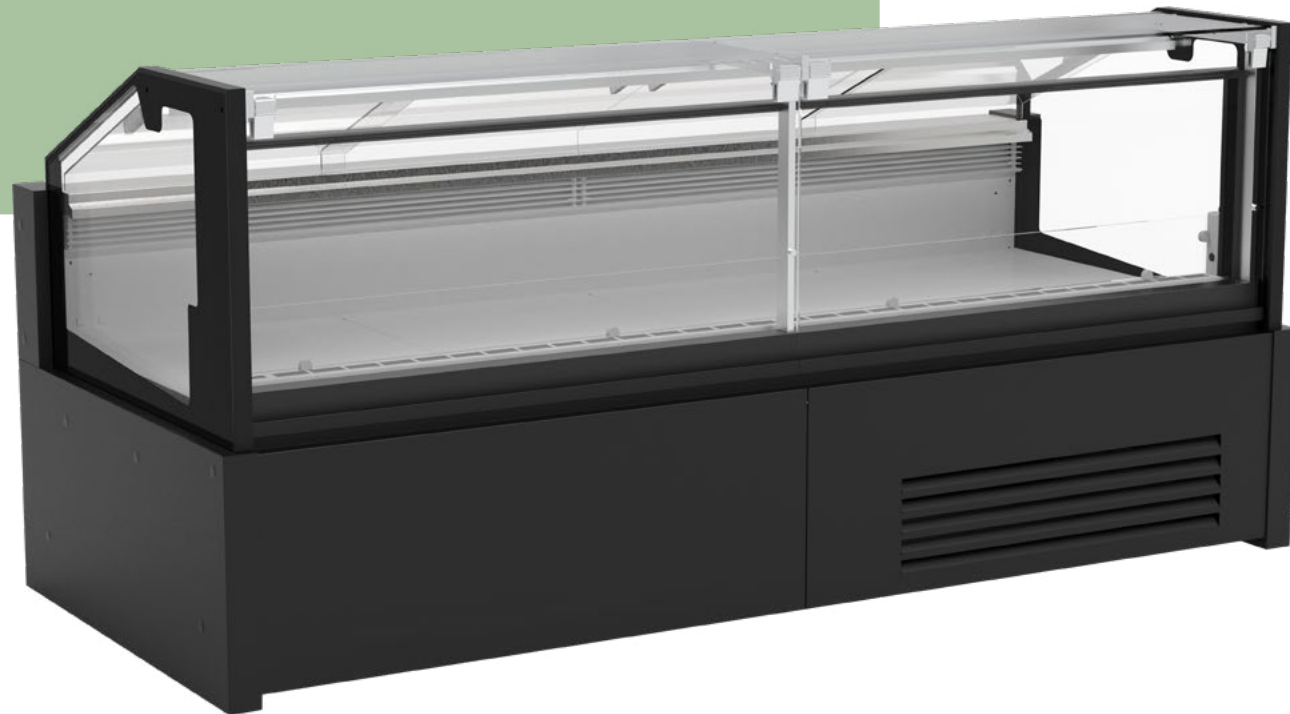

± °C LT: 3L1 (-15/-18°C), 3L2 (-12/-18°C)

mm 1250 | 1875 | 2500 | 3750

mm 1250

mm 1200

mm 70


Plug-in

Electric Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



BARRACUDA V1 800 FG

Falcon PI

Plug-In Semi-Vertical Multi-Deck Cabinet
Steckerfertiges Offenes Niedriges Kühlregal



± °C MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C) |
FV: 3H1 (+1/+10°C)

mm 937 | 1250 | 1875 | 2500

mm 1500 | 1600 | 1700 | 1800

mm 750 | 900 | 1000 | 1100

mm 40


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

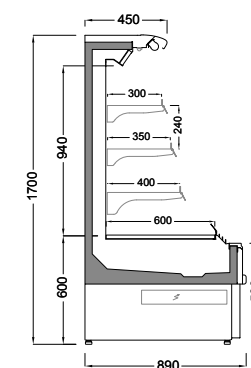

FALCON PI 90/170

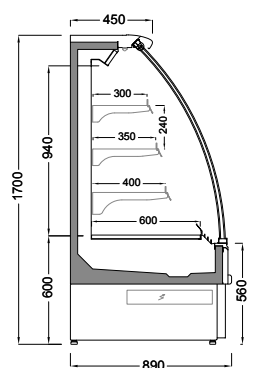

FALCON PI 90/170 SLD


Butterfly PR

Plug-In Pastry Semi-Vertical Cabinet with Flat Glass
 Steckerfertiges Konditorei-Kühlvitrine mit geraden Glasflächen



$\pm$ °C	DP: 3M2 (-1/+7°C)
	625 937 1250
	1350
	750
	40
	Plug-in
	Off-Cycle Defrost
	HFC, HFC/HFO Blend, R290
	25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



BUTTERFLY V1 PR/FG/75/135


Butterfly PR/CG

Plug-In Pastry Semi-Vertical Cabinet with Curve Glass
 Steckerfertiges Konditorei-Kühlvitrine mit Rundgebogenen Glasflächen



$\pm$ °C	DP: 3M2 (-1/+7°C)
	625 937 1250
	1350
	750
	40
	Plug-in
	Off-Cycle Defrost
	HFC, HFC/HFO Blend, R290
	25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



BUTTERFLY V1 PR/CG/75/135

937 | 1250

 750

 Non-Refrigerated Non-Refrigerated

937 | 1250

 Non-Refrigerated Non-Refrigerated


Butterfly BA

Counter Connectable with Butterfly Cabinets
Konditorei-Verkaufstheke



	600 700 800
	900
	750
	7040


Sectional Drawings Kesit Çizimleri



BUTTERFLY V1 BA 75/90


Butterfly MFT

Plug-In Combined Pastry Cabinet
Steckerfertiges Konditorei Kühlvitrine mit kombinierte SB

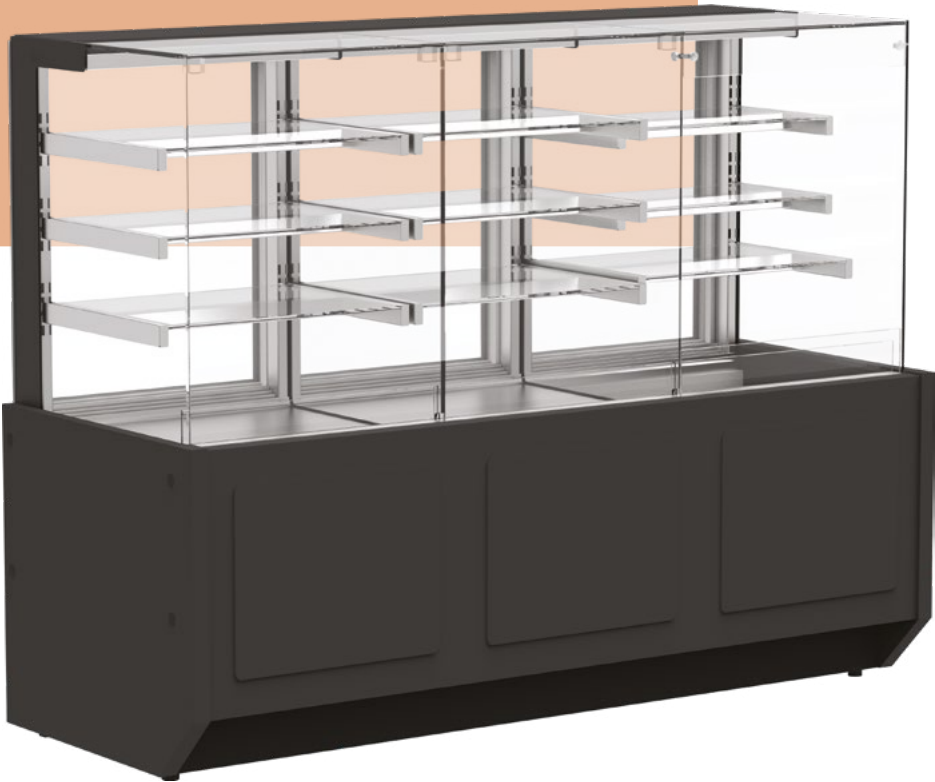

	DP: 3M2 (-1/+7°C)
	705 1330 1955 2580
	1400
	800
	INC
	Plug-in
	Off-Cycle Defrost
	HFC, HFC/HFO Blend, R290
	25°C DBT / 60% RH (ISO 23953-2)


Sectional Drawings Kesit Çizimleri



BUTTERFLY MFT 75/140

Dove

Plug-In Pastry Semi-Vertical Cabinet with Curve Glass
Steckerfertiges Konditorei-Kühlvitrine mit Rundgebogenen Glasflächen

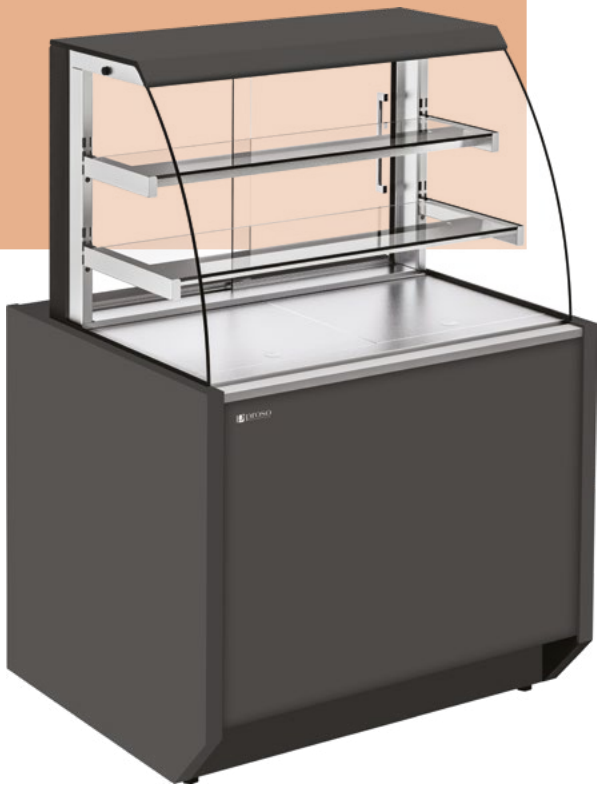

± ° DP: 3M2 (-1/+7°C)

mm 1020 | 1310

mm 1500

mm 750 | 900

mm INC


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri




DOVE V1 PR/90/150



DOVE V1 PR/SS/90/150

Dove FG

Plug-In Pastry Semi-Vertical Cabinet with Flat Glass
Steckerfertiges Konditorei-Kühlvitrine mit geraden Glasflächen

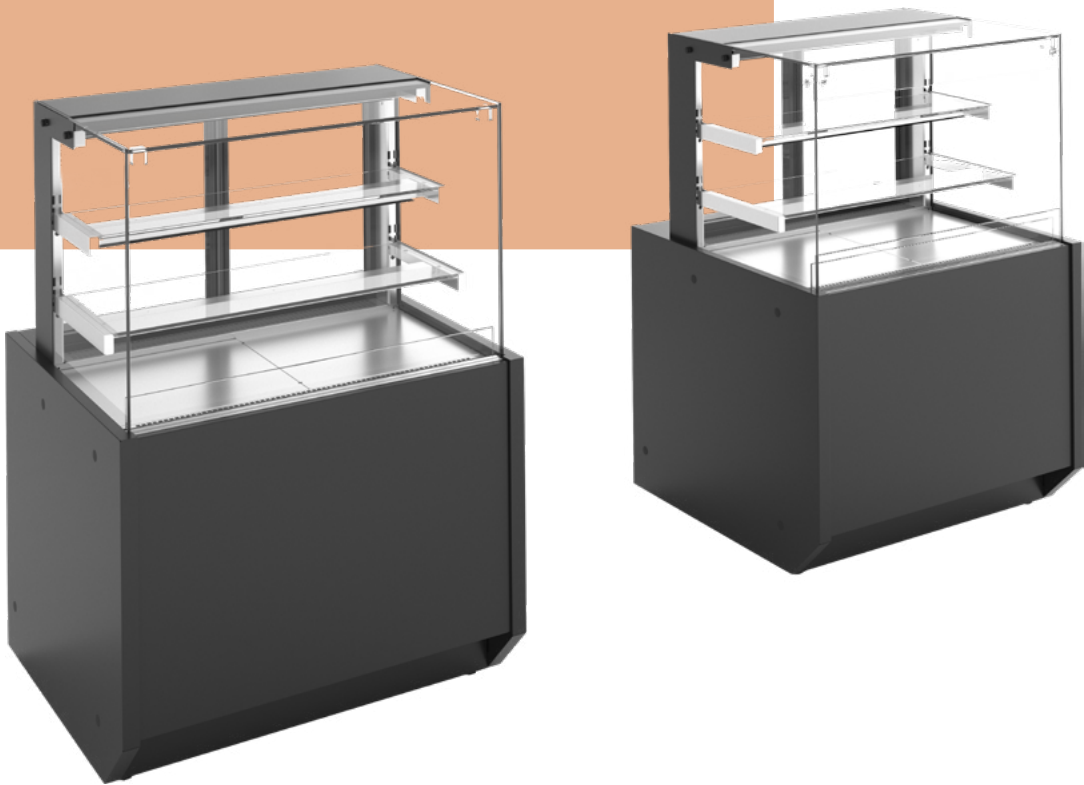

± ° DP: 3M2 (-1/+7°C)

mm 1020 | 1310

mm 1500

mm 750 | 900

mm INC


Plug-in

Off-Cycle Defrost


HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri



DOVE FG SS 730/H1520



DOVE FG 730/H1520

Buffalo

Plug-In Carcase Meat Display Cabinet
Steckerfertige Fleischkühlvitrine für Karkassenfleisch



± C° MT: 3M1 (-1/+5°C) | DP: 3M2 (-1/+7°C)

1350 | 1680 | 2000
mm

2400
mm

750
mm

INC
mm


Plug-in

Off-Cycle Defrost

HFC, HFC/HFO Blend, R290

25°C DBT / 60% RH (ISO 23953-2)

Sectional Drawings Kesit Çizimleri

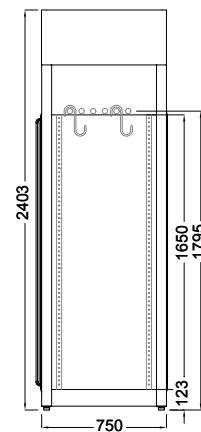

BUFFALO 75/H240



Freeze Tech

info@freezotech.me | +385916151158
+4915228475519 | +4915731773134